



TECHNICAL DATA SHEET

Date NO. 63

17th March, 1960.

Issued by Engineering Division,
M.I. (Australia) Ltd.,
2 Parramatta Rd.,
Homebush...N.S.W.


MODEL L1

A circuit change has been made in the above model to reduce hum.

The change commenced with S/N02698 and consists of adding a filter section to the anodes of V4 as shown in the circuit below:

Modified Circuit (Additions shown dotted)

V4-12AX7

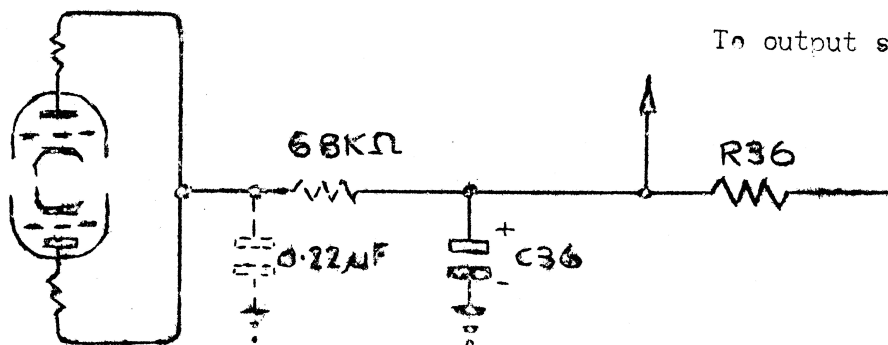

Components added are:-

740-0562 resistor, $68K\Omega \pm 20\% \frac{1}{2}W$.

279-1781 condenser, $0.22 \mu F \pm 20\% 400 V.W$.