

※ Please kindly amend TR₆ 2SA173 to 2SB171.

SPECIFICATIONS

Frequency Range : MW 540 ~ 1600 KC (555.6 ~ 187.5 m)
 S W 3.9 ~ 12 MC (76.9 ~ 25 m)


Intermediate Frequency : 455 KC


Sensitivity : MW 100 μV / m.
 (for 50mW) S W 120 μV / m

Power Output : 200mW undistorted
 300mW maximum

Fine Tuner : Midget Varicon

Speaker : 4 1/8" × 2 1/2" PM dynamic speaker



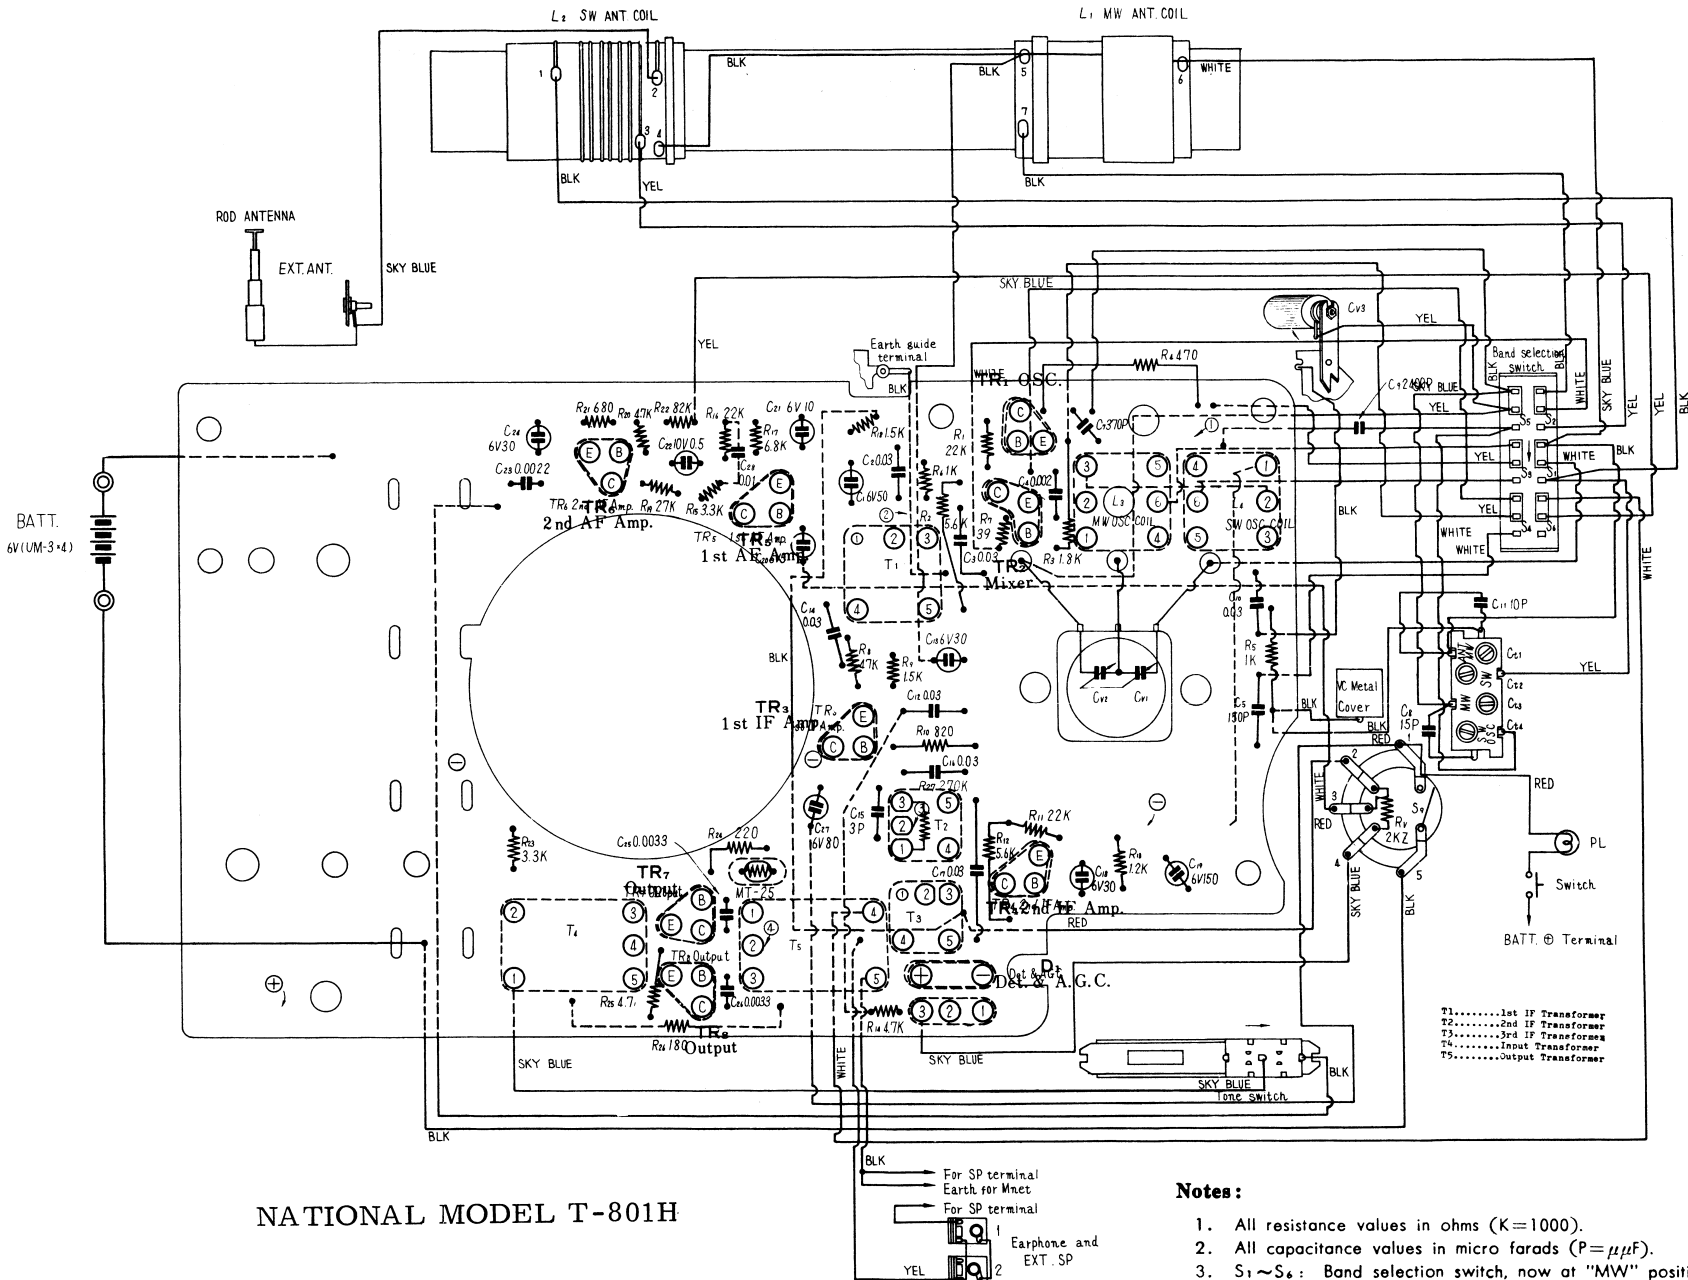

NATIONAL MODEL T-801H