



### 31-7 RECEIVER VIBRATOR TABLE MODEL, 6 VOLT OPERATION



POINTER IN THIS POSITION  
WITH GANG CLOSED.

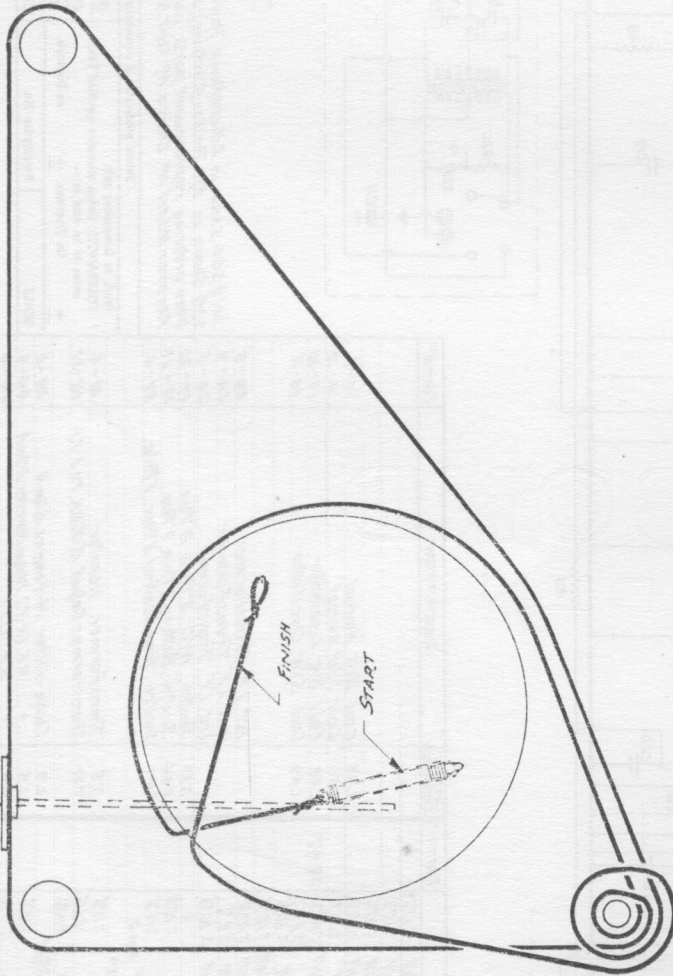

RECEIVER VIEWED FROM BACK OF PANEL.  
CONTROL POSITIONS READING FROM LEFT TO RIGHT.

# PROCEDURE FOR REMOVING RECEIVER FROM CABINET.

11-28, 41-5, 31-7

1. INVERT RECEIVER, BREAK SEAL & REMOVE NUTS ONE AT EITHER END OF BASE.
2. LIFT OFF BASE AND REMOVE STUDS, ONE IN EITHER END OF CHASSIS.
3. RECEIVER MAY NOW BE REMOVED.

MATERIAL		Before production is commenced 2 samples must be submitted to Drawing Office for approval.									
FINISH		DRAWN		USED ON		USED ON		QTY.		QTY.	
		M. F. 23-3-53									
		CODING									
		PLANNING									
		CHECKED									
SCALE		Prescription No.									
<p><b>DIAL DRIVE ASSEMBLY</b></p> <p>RECEIVERS AS LISTED</p>											
SHEET No.		This Drawing must be returned to									
No. of Sheets.		KRIESLER (A'SIA) PTY. LTD.									
		43 ALICE ST., NEWTOWN, SYDNEY.									
		APPROVED									
		ISSUE 1									
		Card No.									
		File No.									

31-7 - TUNING - WAVE CHANGE - BATTERY - VOLUME - TONE