


Alterations to Briton Models 3 and 4

Early serial numbers of Briton model "3" are fitted with solenoid type tuning coils. In later models pie-wound coils were used and a "Sirufer" permeability-trimmed aerial coil was included.


A further feature will be found in the later serial numbers of this model in the form of inverse feed-back. This is obtained by connecting a 2 megohm resistor and a 0.00025 mfd. mica condenser (in series) between the plate and grid of the output pentode. This system also was applied to model "4."

Diagram of Battery Connections. Models 5, 6, 7.

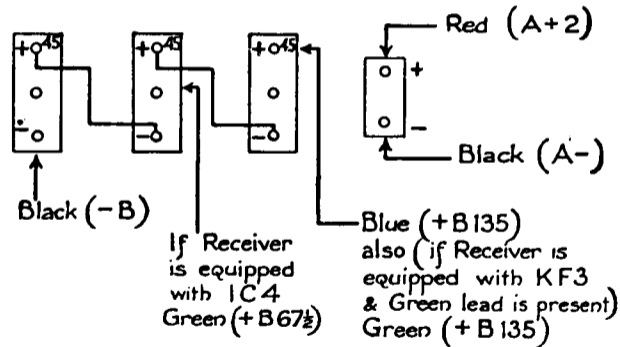

Briton Electrical & Radio Pty. Ltd.
152-156 Parramatta Rd.
Petersham.

"Briton" Battery Operated Broadcast Console Model 5

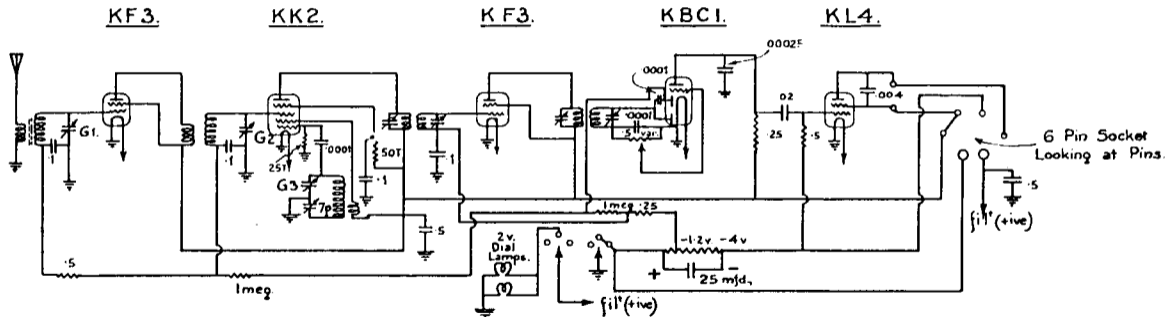

Intermediate Frequency—462.5 kC. 8-inch, permag. loudspeaker.