



SPECIFICATIONS

- Frequency range...540~1,600kc
- IF frequency455 kc
- Power SourceStandard 9V Batt.
- Output70 mw
- Speaker2 1/4" P.M. Dynamic
- Toshiba PNP alloy junction transistors
 - 2S52/2SA521 (Converter)
 - 2S49/2SA491 (I.F. Amplifier)
 - 2S53/2SA531 (I.F. Amplifier)
 - 1N601 (Germanium diode
Detector AGC)
 - 2S54/2SB541 (A.F. Amplifier)
 - 2S56/2SB562 (class B Push Pull
Power Amplifiers)
- Dimensions4 1/8" x 2 5/8" x 1 1/4"
- Weight10 ozs
- Batteries sold everywhere
 - Toshiba006P
 - Eveready216
 - Burgess2U6
 - RCAVS312
 - Ray-O-vac1604

MODEL : 6TP-309A

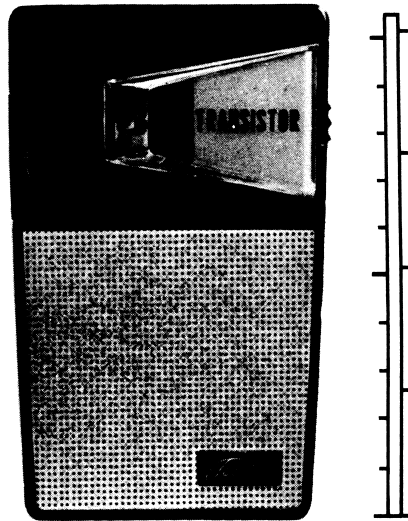

CIRCUIT DIAGRAM

