

HEALING

MODEL 900T

TR1
2N1632

TR2
2N1636
TR3
2N1636


TR4
2N1634

TR5
2N1634

TR6
2N408

TR7
2N408

TR8
2N217S
TR9
2N217S } MATCHED

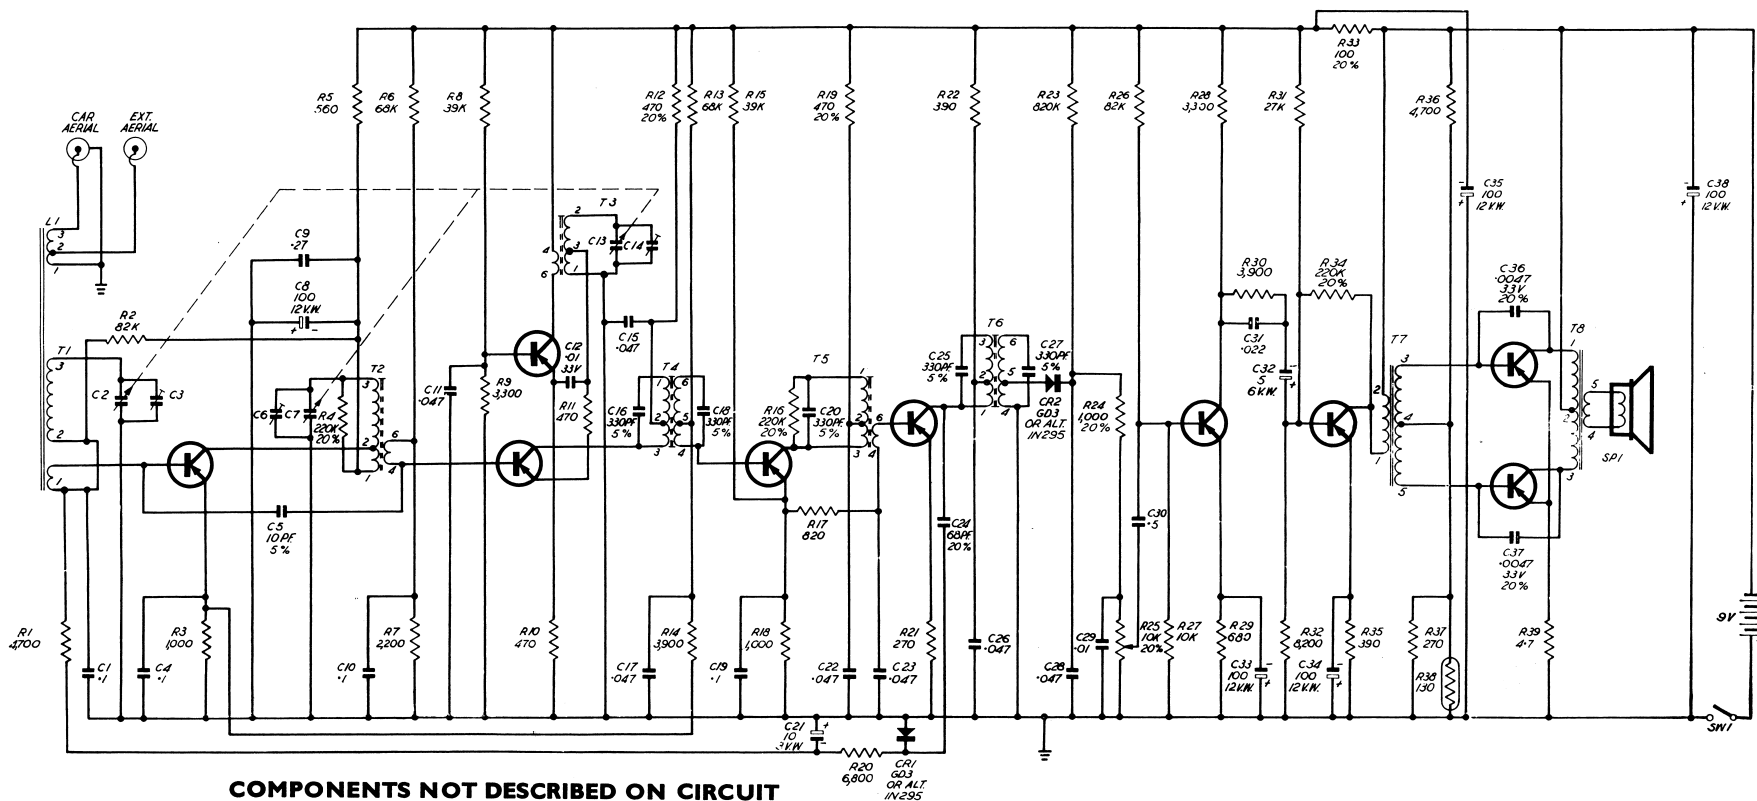


COMPONENTS NOT DESCRIBED ON CIRCUIT

Circuit No.	Description
SPI	Speaker, Rola, 5-4F with F90 cone.
C2, C3 C6, C7 C13, C14	Capacitor, Variable, Padderless RL946, MSP Type 21372
R25	Resistor Variable Carbon (special curve) RL860
R38	Resistor, NTC. 130 ohms at 20°C

NOTE: All electrolytic capacitors are in mfd. Voltages as specified. All ceramic capacitors are in mfd. + 80% - 20% tolerance 25 volt unless otherwise specified.

All resistors are in ohms $\frac{1}{2}$ watt 10% TOL, unless otherwise specified. In early receivers, C30 is .5 mfd. 6 VW electrolytic capacitor.

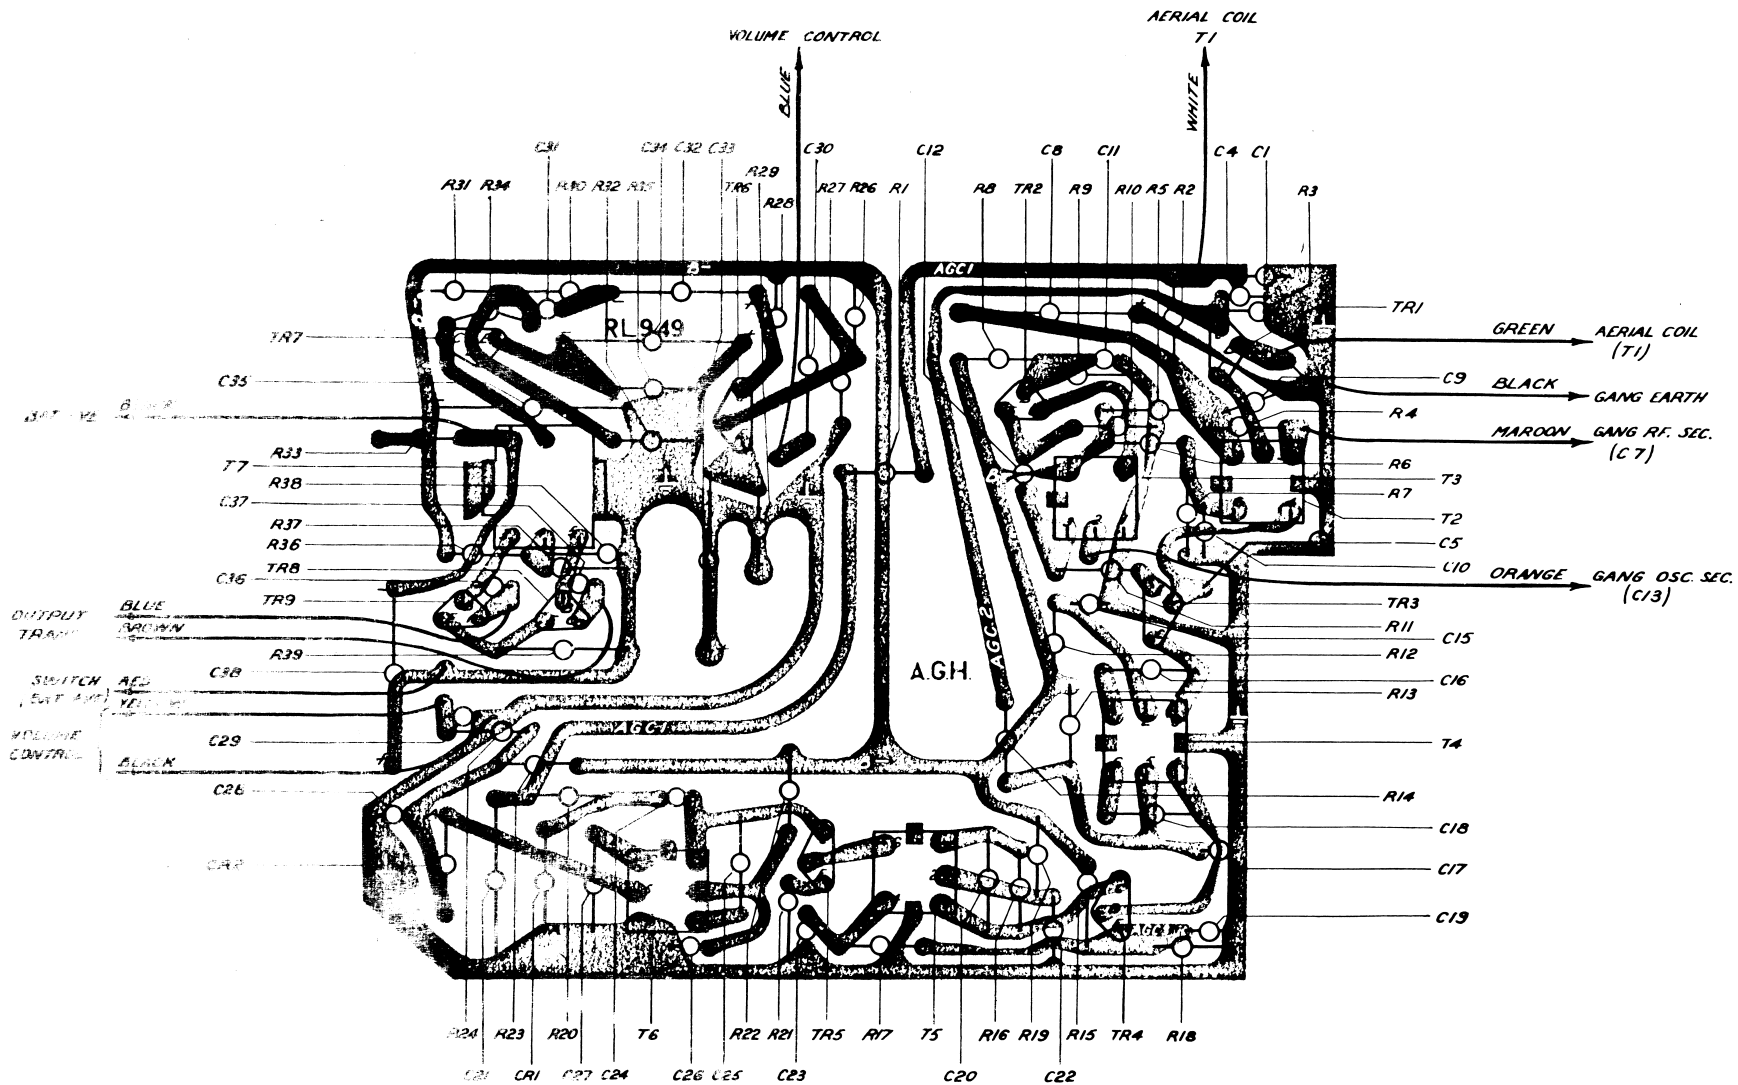

NOTE - VIEWED FROM SOLDERED SIDE OF BOARD