




CONNECTIONS




R1120




Section AA View TR1



TR2 - TR6



VT2-VT7




VT1



JK1 - JK3

NOTES- ARROW ON POTENTIOMETER INDICATES DIRECTION OF CLOCKWISE ROTATION
 VOLTAGES MEASURED ON MW POSITION WITH NO SIGNAL INPUT AND VOLUME MAXIMUM. VOLTAGES SHOWN ARE POSITIVE WITH RESPECT TO CHASSIS (BATTERY NEGATIVE TERMINAL.)
 * MAY VARY IN PRODUCTION.


Drive Cord Replacement:

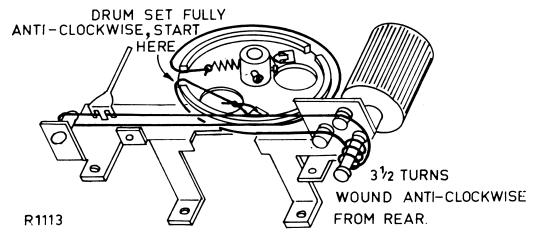


R1113

Fig. 2.

Fig. 2 shows the route of the cord and the method of attachment.



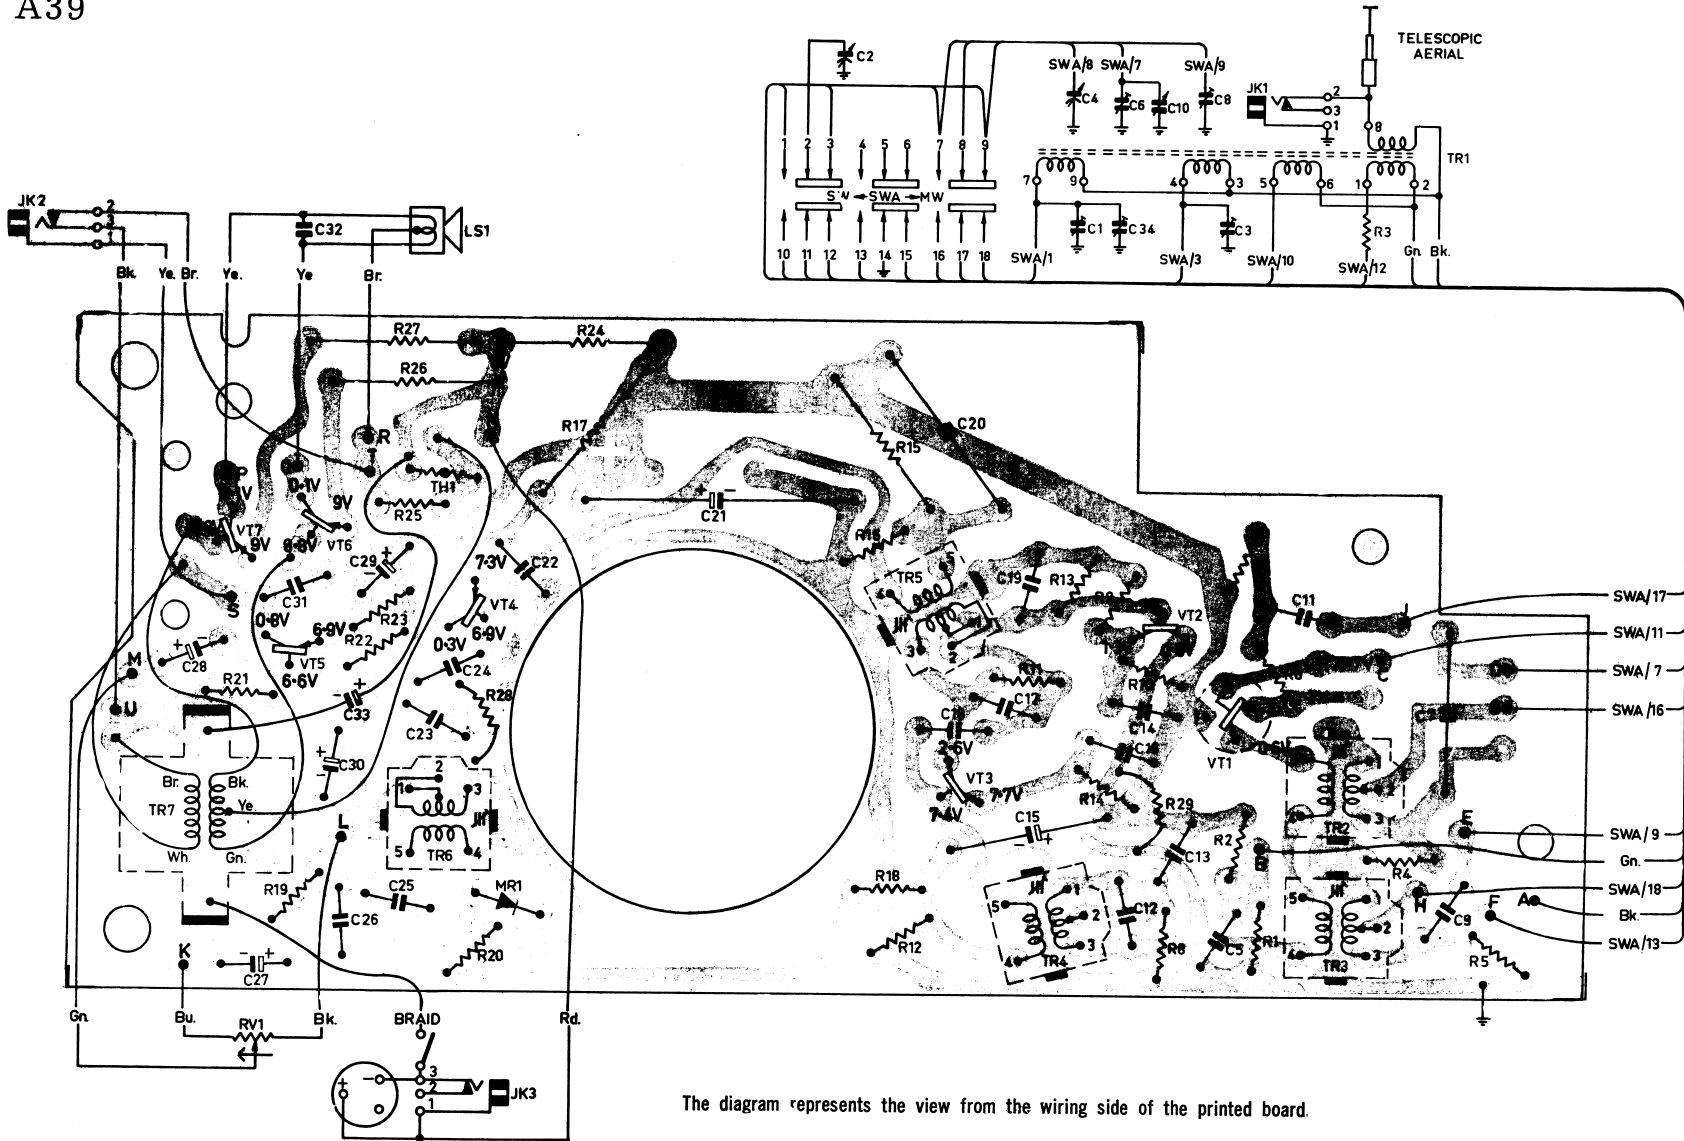

The diagram represents the view from the wiring side of the printed board.