



SPECIFICATIONS


Frequency Ranges: MW 540 – 1605 kHz
 FM 87.5 – 108 MHz
Intermediate Frequency: MW 455 kHz
 FM 10.7 MHz
Sensitivity: MW 20 μ V (for 500 mW output)
 FM 6 μ V (for 500 mW output)
Sensitivity for Signal Seeking: MW 20 μ V
 FM 6 μ V
Signal to Noise Ratio: MW 25 dB (at 56 μ V signal input)
 FM 35 dB (at 25 μ V signal input)

Selectivity: MW 20 dB (at 10 kHz off-tuning from 1000 kHz)
Audio Output: Undistorted 3.5 W
 Maximum 5.0 W MW FM
Fidelity: Average 100 Hz -3 dB -3 dB
 4000 Hz -15 dB -4 dB
Power Source: DC 12 V, Negative grounded battery
Speaker: 5" Permanent Dynamic Type
 Voice Coil Impedance 4 ohms.

Sanyo F-8605A



S123

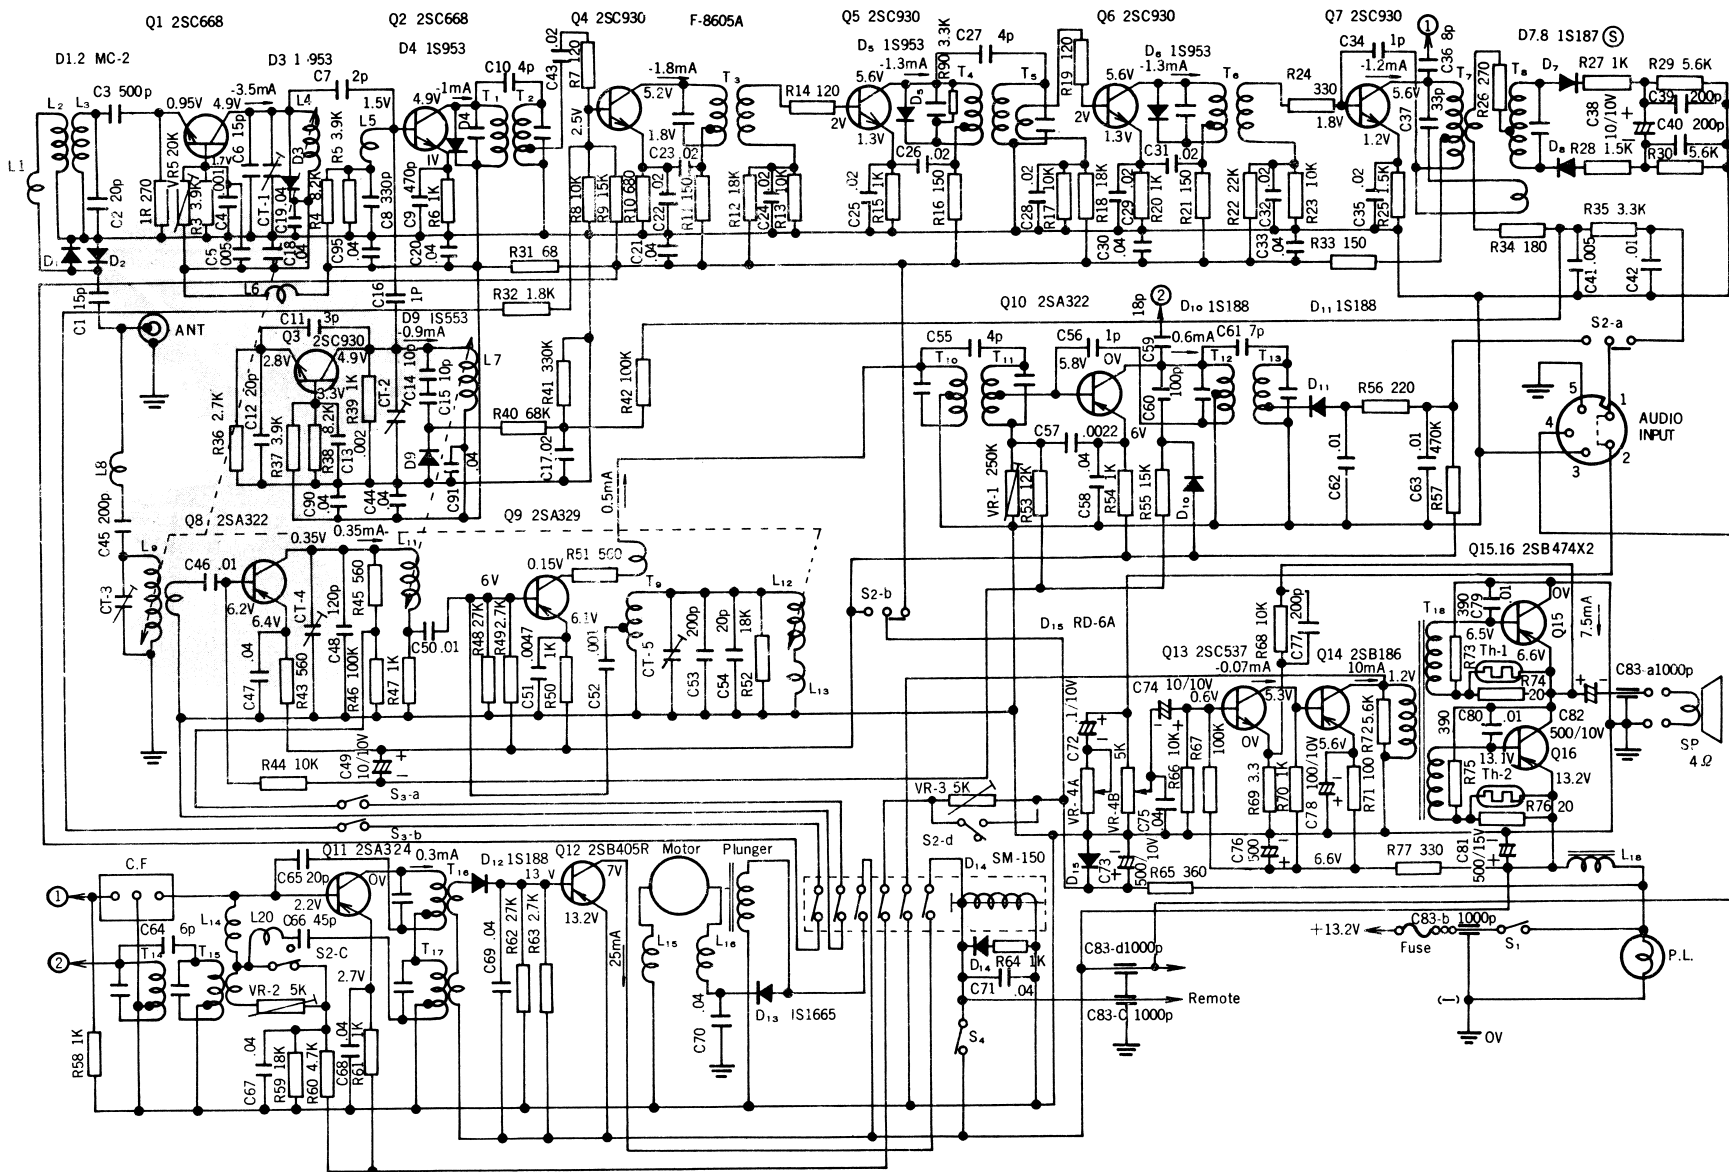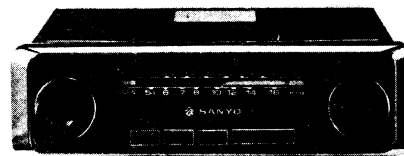

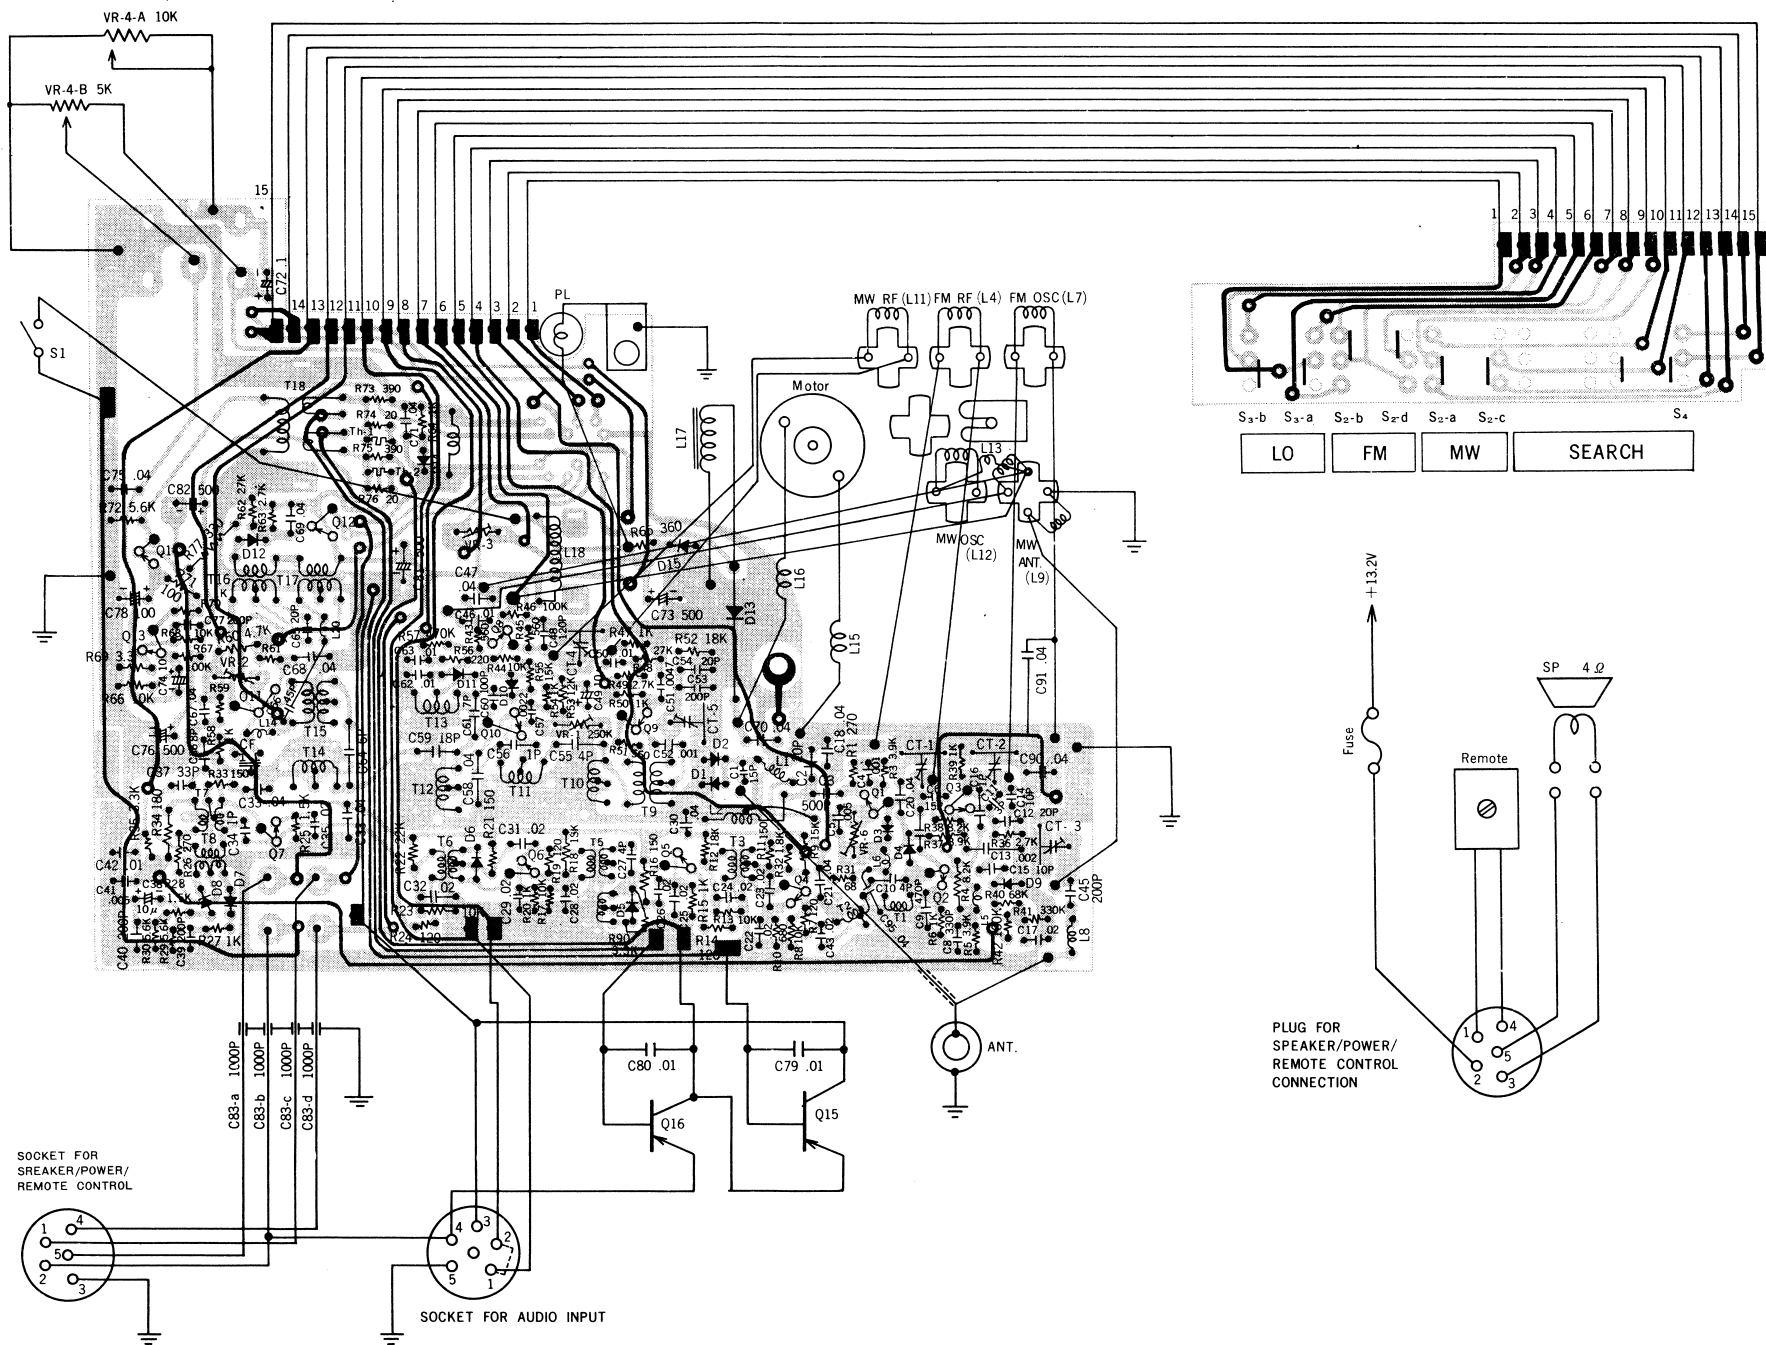

SOCKET FOR
SPEAKER/POWER/
REMOTE CONTROL

SOCKET FOR AUDIO INPUT

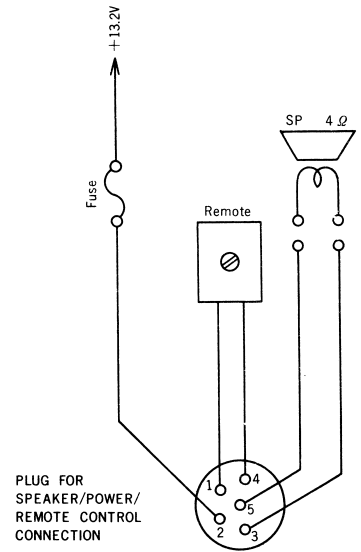

PLUG FOR
SPEAKER/POWER/
REMOTE CONTROL
CONNECTION