TAPE PLAYER MAINTENANCE

In time, oxide from recording tape will accumulate on the tape head and capstan shaft which can cause tape hiss and erratic operation.
The more often the tape player is used, the more often it should be cleaned.

Clean the head with a cotton swab moistened with isopropyl alcohol. DO NOT USE CARBON TETRACHLORIDE.

To clean the capstan shaft, first turn on the motor by depressing the motor switch with the eraser end of a pencil. Use a cotton swab moistened with alcohol on the shaft.

After cleaning head and shaft, depress eject button.

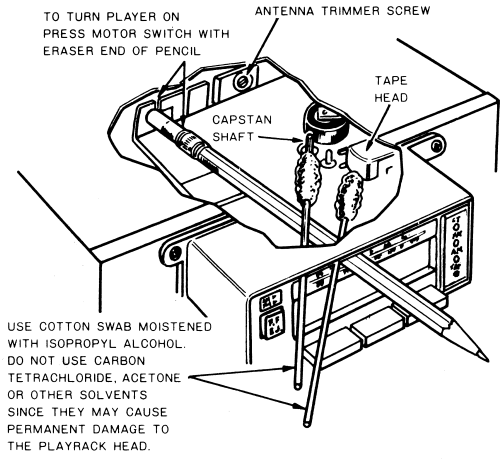

RUBBER TRIM PLATE INSTALLATION

1. For custom installation look in Ford or General Mortors Cars rubber trim plate is used between the radio and the dash. Refer to illustration below.
2. For GM cars the rubber trim plate should be cut per markings on the reverse side of the rubber trim plate. For Ford cars cutting is not required.
3. Plastic trim plate will not be used in this type of installation.
4. Insert unit into INSTRUMENT PANEL.

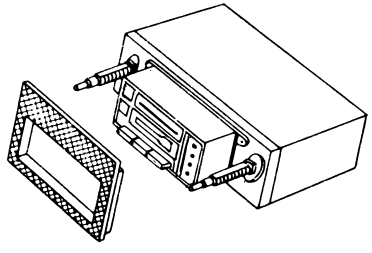

PRINTED IN JAPAN