

'diamond-dot'

CAR RADIO DIVISION, ELECTRONIC INDUSTRIES LTD.

ASTOR HOUSE: 161-173 STURT STREET, SOUTH MELBOURNE Phone: 69 0300

SERVICE DATA

PRINCE "GLORIA"

INSTALLATION INSTRUCTIONS FOR FITTING

ASTOR 12 VOLT CAR RADIO

MODELS PD-C - - and MD-C - - "J" SERIES RECEIVERS

PRINCE - 4

File : PRINCE

Date : 19.8.1966

Page : 1

In addition to the selected receiver the installation requires:

Installation Accessory Package - Part No. 7281-129-04

Aerial - 5 Section, telescopic whip, top mount type - Part No. 4074-044-04
or Aerial - 5 Section, telescopic whip, lock down type - Part No. 4074-052-04

WARNING: BATTERY CONNECTION OF INCORRECT POLARITY WILL DAMAGE THE RECEIVER


Before commencing the installation disconnect the leads from car battery. Note the polarity of battery terminal which is connected to vehicle chassis then set receiver polarity changeover switch to the corresponding position. i.e. "+" position, positive to chassis, "-" position, negative to chassis.

NOTE: AERIAL TRIMMER located on passenger side rear corner of receiver is to be adjusted at the conclusion of installation.

THE AERIAL as selected is to be mounted on top of passenger side fender $4\frac{1}{2}$ " forward from junction of fender and door chrome strip and $2\frac{3}{8}$ " inward from strip.

LEAD-IN CABLE: From underneath fender pierce a hole in the grommet located behind the flange in the kick pad wall.

Feed lead through grommet into interior of car.

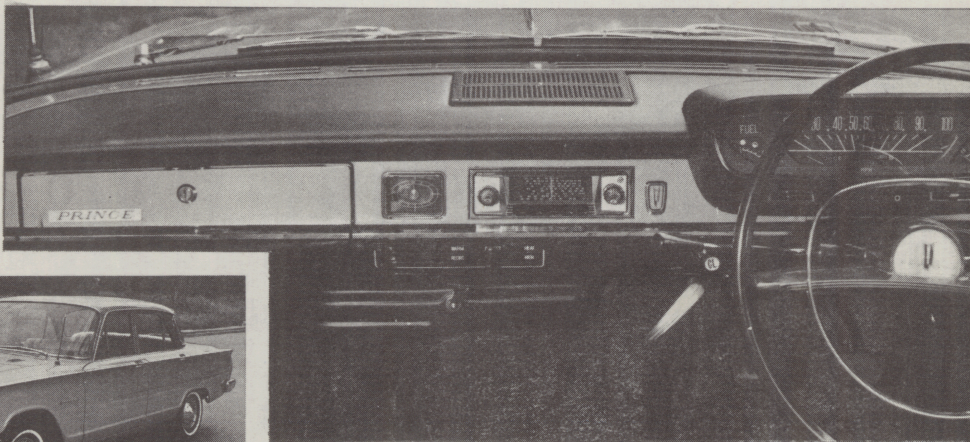

7135-273-70

PRINCE "GLORIA"

MODELS PD-C - - and MD-C - - "J" SERIES RECEIVERS

COMPONENT PARTS LIST

4077-093-72

Aerial lead-in cable (1) 42" overall

SPEAKER AND MOUNTING ACCESSORIES

4056-012-11

Speaker (1) 7"x 5" permag type C75L36/46/15

7054-043-02

Clamp Bracket (4)

7310-013-01

Pal Nut (4) 10-32

1171-015-01

Lead - 18" required

7171-015-02

Plug (1) on end of lead

7102-071-01

Fabric (1) speaker cover

RECEIVER MOUNTING ACCESSORIES

7084-253-02

Cover escutcheon (1) chrome

7055-425-02

Spacer Ring (2) control bush lock nuts

7173-042-04

Dial Pointer (1)

7084-147-01

Dial Escutcheon Assy. (1)

includes :

"Diamond Dot" emblem

"ASTOR" metcal

7081-001-01

Chrome washer (2)

7008-123-01

Barrel Nut (2)

7261-484-02

Knob (2) antiference and tone, rear

7150-854-02

Knob (2) tuning and volume, front

7124-425-01

Washer (2) flat steel, 9/16"x11/64"

7124-424-11

Screw (2) $\frac{3}{8}$ "x No. 8 bdr. hd.

7261-164-01

Fuse (1) 3 Amp.

7201-079-08

Fuse Holder - Body (1)

4071-010-01

Spring (1) fuse holder

7113-001-01

Contact (1) fuse holder

7225-012-02

Terminal (1) on end of lead

7086-125-04

Lead - 12" required

7171-056-02

1169-051-08

INTERFERENCE SUPPRESSION ACCESSORIES

4009-024-23

.5uF Capacitor, alternator by-pass

4009-024-02

.5uF Capacitor, ignition coil by-pass

7209-126-11

Screw (1) 5/16" x 10-32 self threading

COMPONENTS SUPPLIED WITH RECEIVER

7070-115-11

Dial Reading (1)

7119-046-01

Filler Bar (1)

7152-272-01

Speednut (2) filler Bar

7065-011-01

Fuse Cover (1)

7086-125-04

Contact (1) fuse cover