


C.Nº	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28
R.Nº	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28

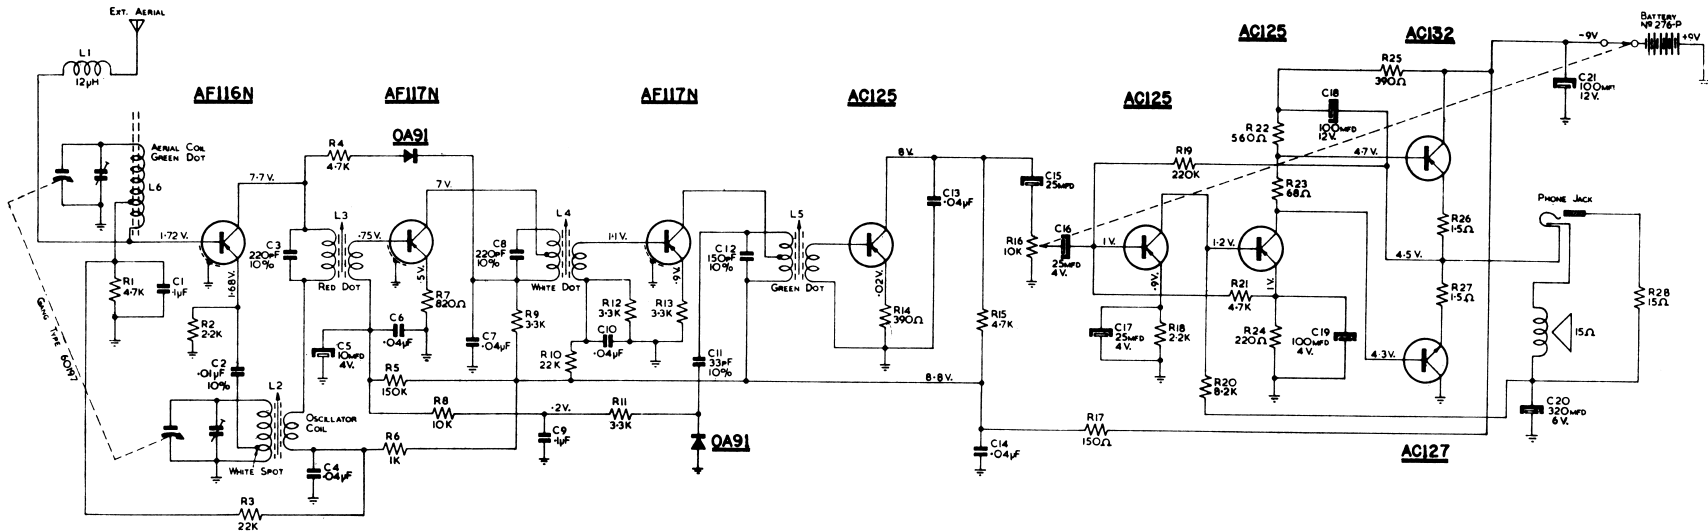

TITAN.

8 TRANSISTOR PORTABLE BROADCAST RECEIVER

MODEL PRT2M

CHASSIS 4-05

FREQUENCY RANGE


530 - 1620 KC/S

I.F. FREQUENCY 455KC/S

ISSUE Nº: 0	
DRAWN	D.R. 15-11-63
CHECKED	28-11-63
APPROVED	28-11-63
PART Nº 4/05/258	

NOTE: ALL CAPACITORS 20% UNLESS OTHERWISE STATED.
 ALL RESISTORS 1/2W. 10%.
 ALL MEASUREMENTS TAKEN ON A.W.A. VOLTOHMYST UNDER "NO SIGNAL CONDITIONS".
 IF RECEIVER IS TUNED TO A STATION, THE VOLTAGES AROUND THE OUTPUT STAGE, THE 1ST I.F. STAGE & THE DETECTOR STAGE WILL VARY.

AFI16N, AFI17N **ACI25, ACI27, ACI32**

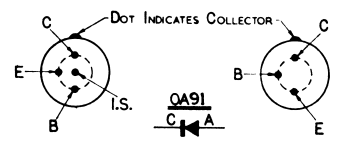

BOTTOM VIEW OF TRANSISTORS