

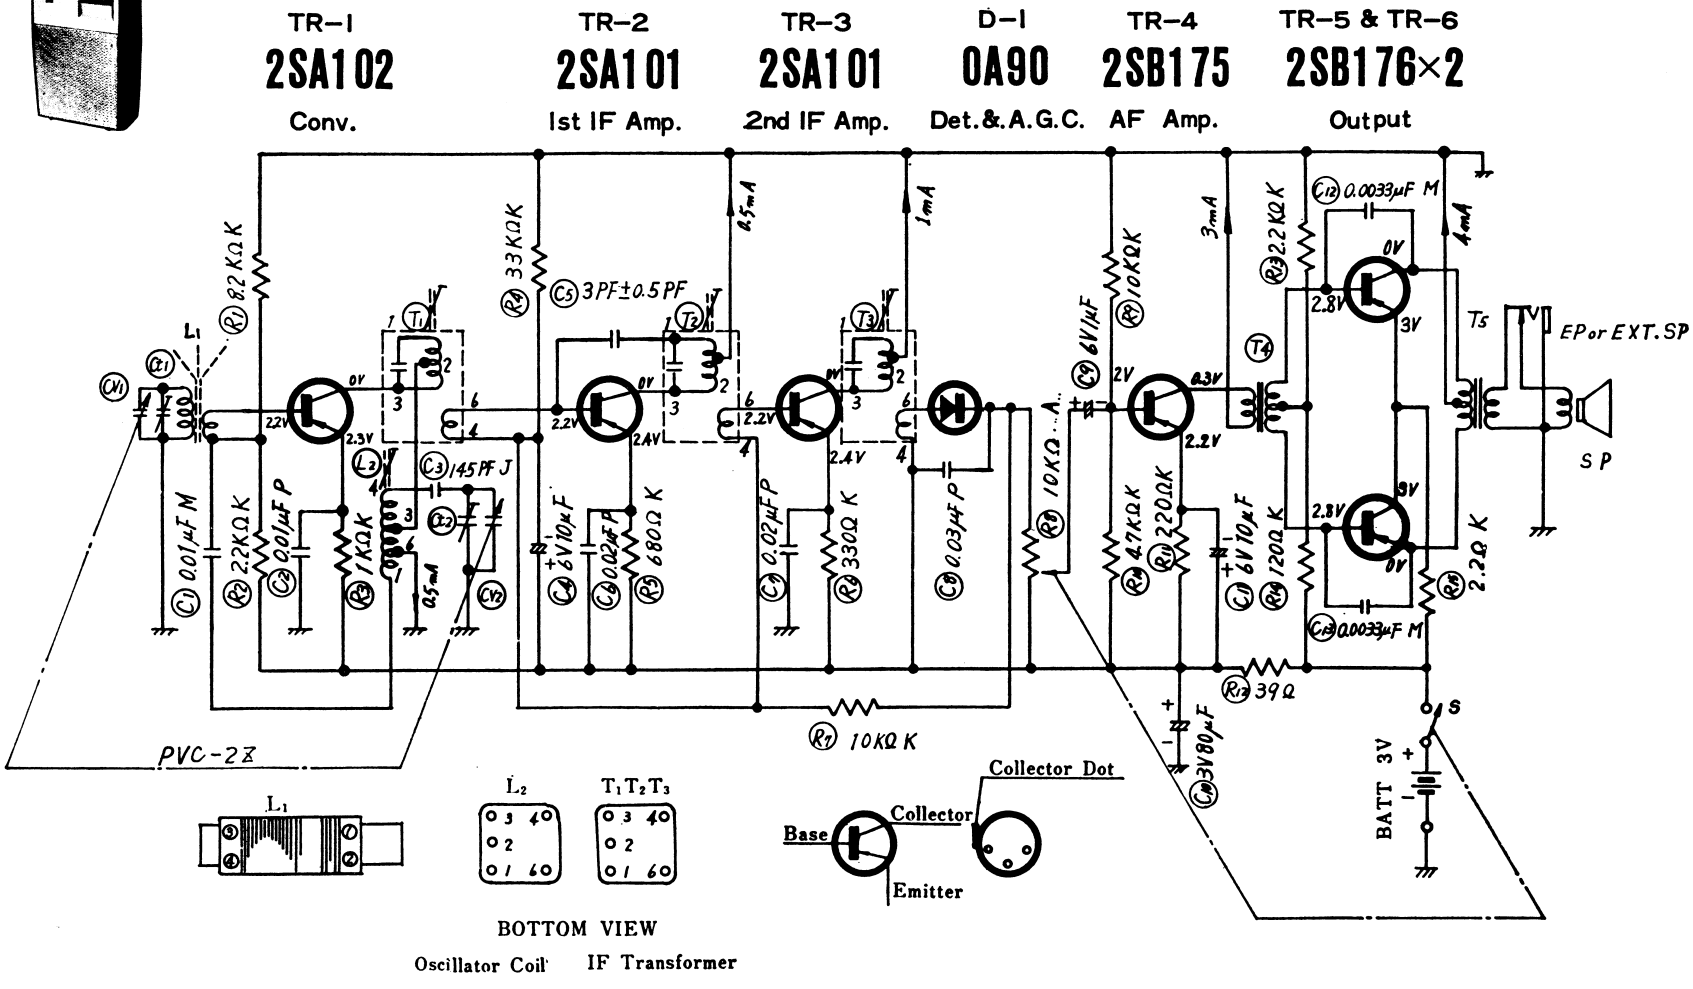

Notes:

1. S: Power Source switch in "OFF" position.
2. Voltage measurements are under no signal condition taken with a 10KΩ/Volt voltmeter and are positive with respect to ground.
3. Capital letters (M, K, J, P) in the circuit diagram show allowable deviations of resistors and capacitors as follows:
   M = ±20% K = ±10% J = ±5% P = +100% − 0%
4. Battery current:

No signal	12mA
Maximum output	90mA

5. PF = pico farad = mmf
   μF = micro farad = MF

NATIONAL MODEL R-108

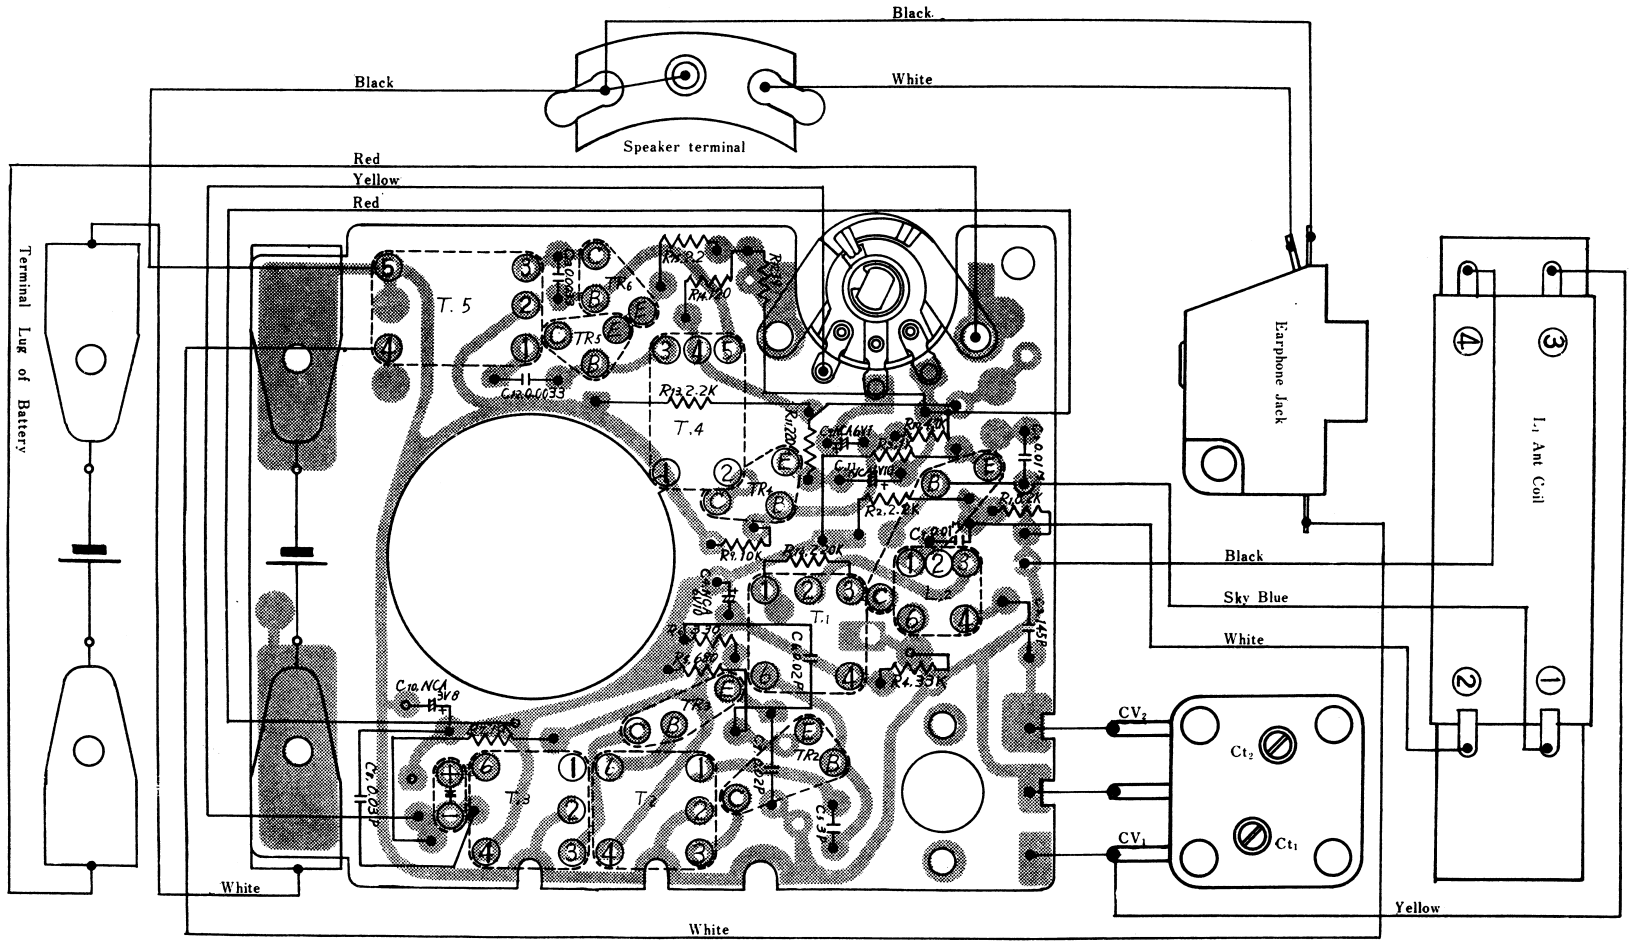
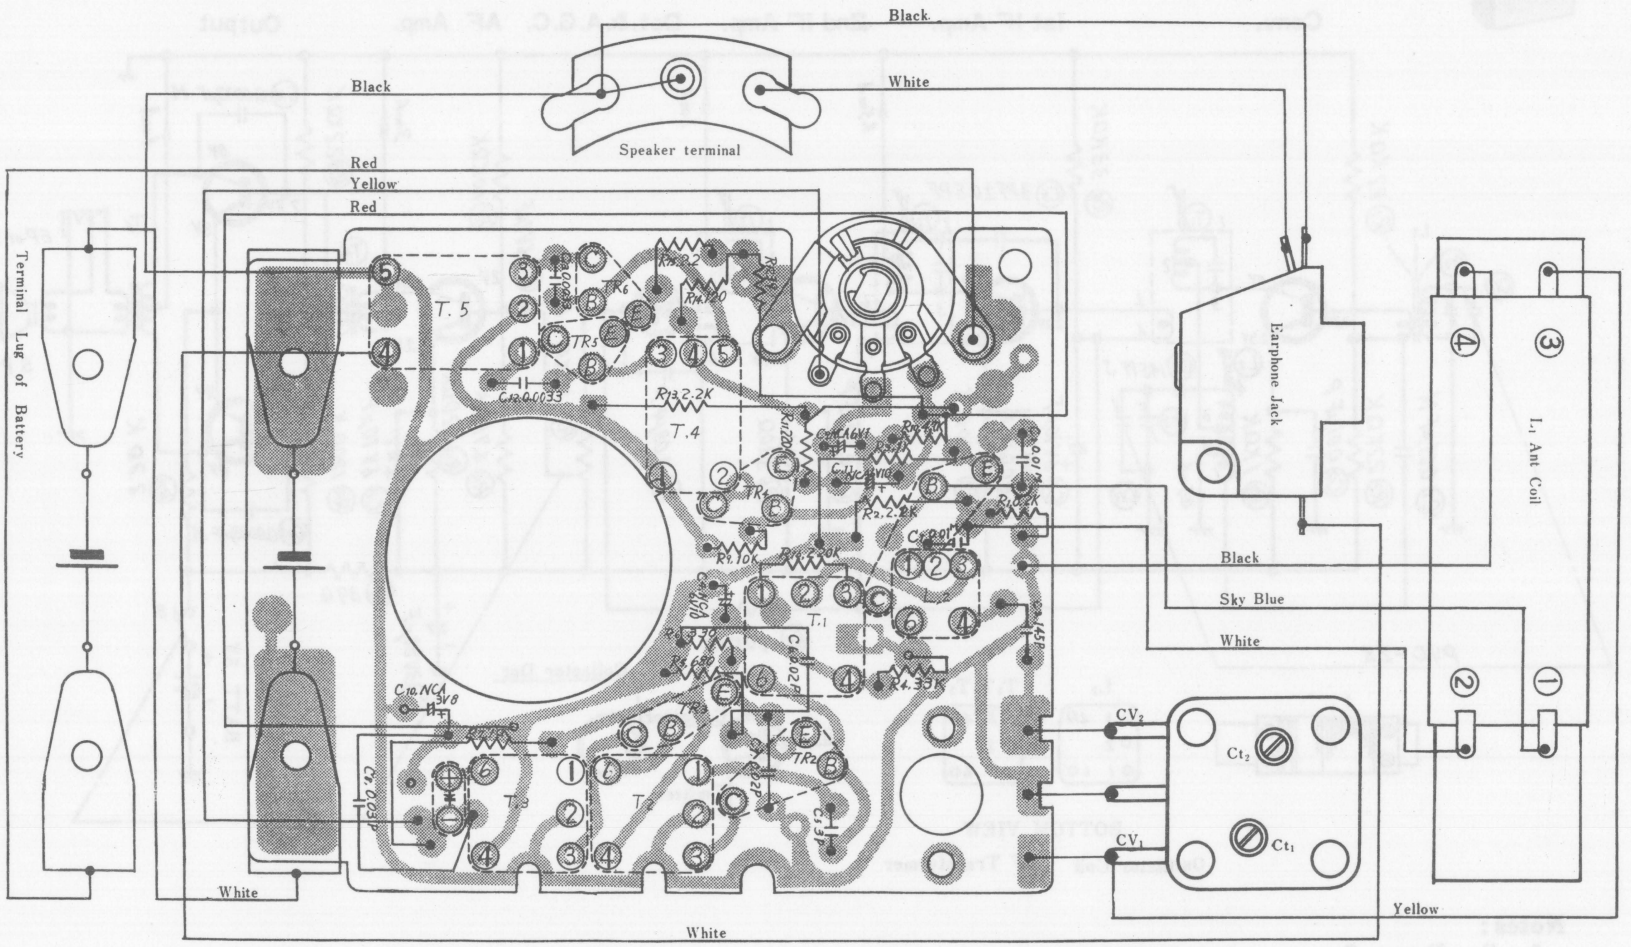
NATIONAL MODEL R-108