


**1. SCHEMATIC DIAGRAM**



Motor :	MV - 12	Micromotor
Pickup :	STX - 54	Crystal turnover type stereo
Cartridge :	SC - 501	
Needle :	LS-4-ST	ST-LP
	LS-4-78	SP (78 r.p.m.)
Speaker :	P-1011SA	3"×10" oval PM dynamic speaker
Power Source :	DC 9V (1.5V×6)	
Power Consumption :	100 ~ 240 m A	
Wow :	less 1%	
Power Output :	180 m W × 2,	undistorted (15%)
	250 m W × 2,	maximum

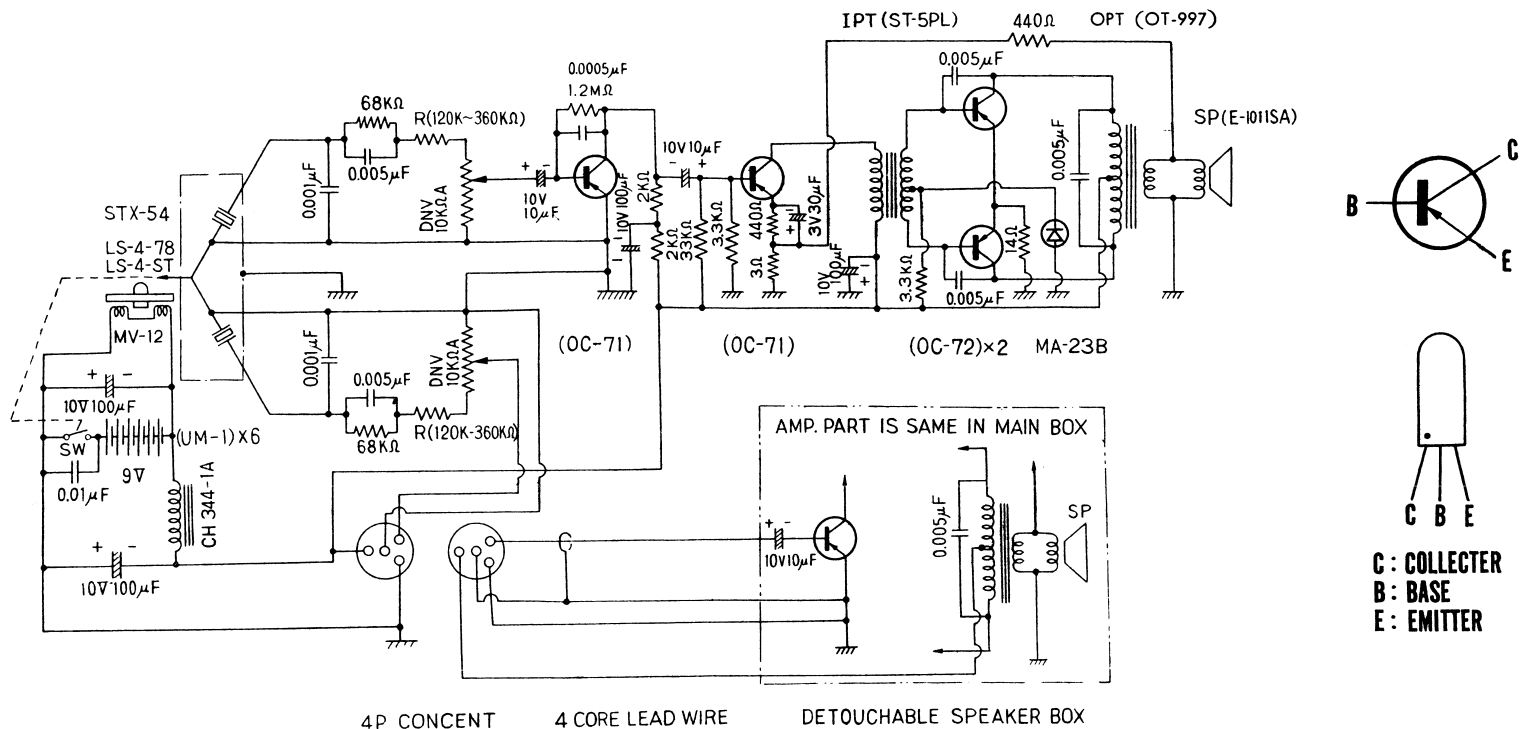

## 2. PARTS LOCATION ON CHASSIS BOARD

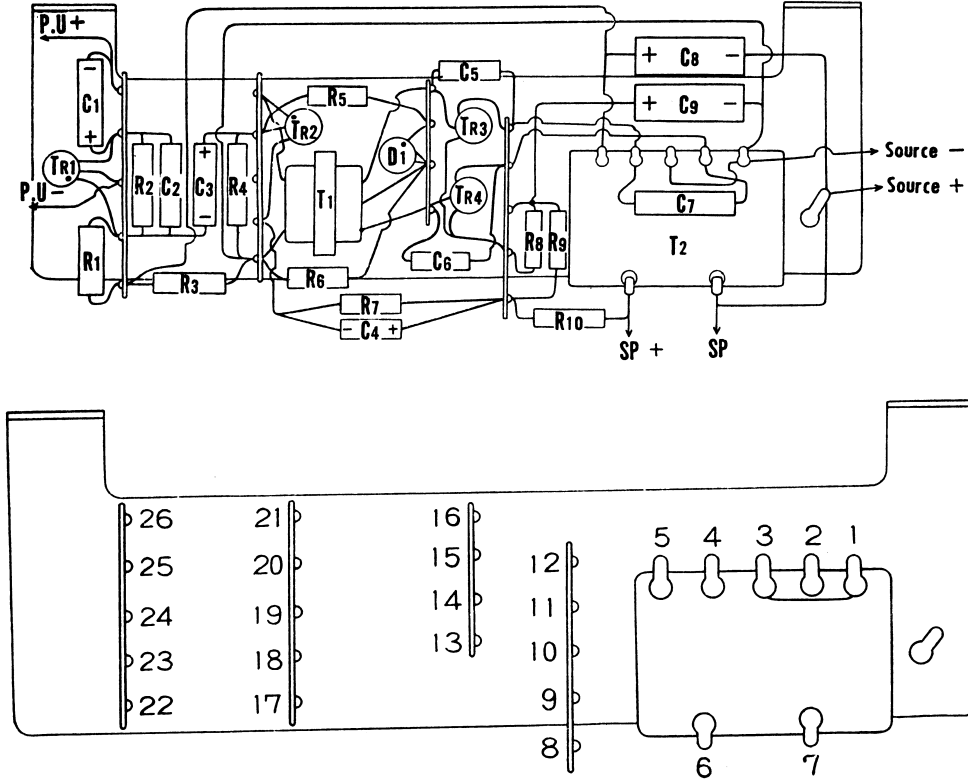


Fig. 2

## 3. PLAYER UNIT BOTTOM VIEW

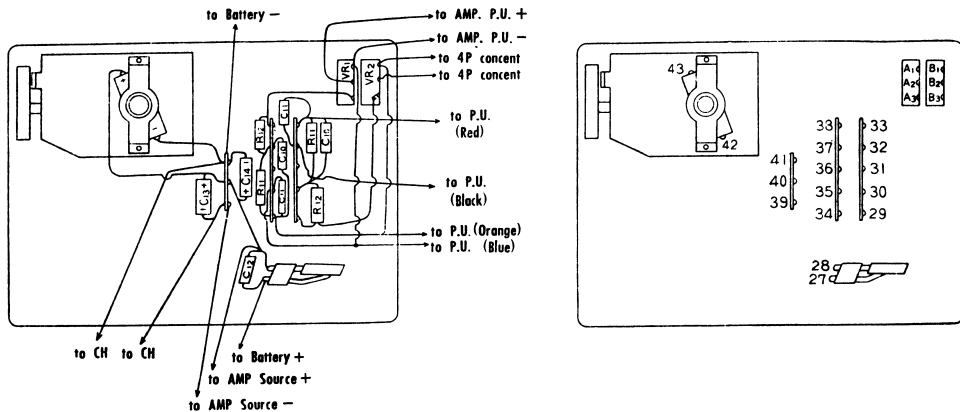


Fig. 3