


- Notes:
1. All resistor values in ohms. (K=1000Ω)
 2. All capacitor values in micro farads. (P=pμF)

Fig. 2 Circuit Board Wiring View (Conductor Side).

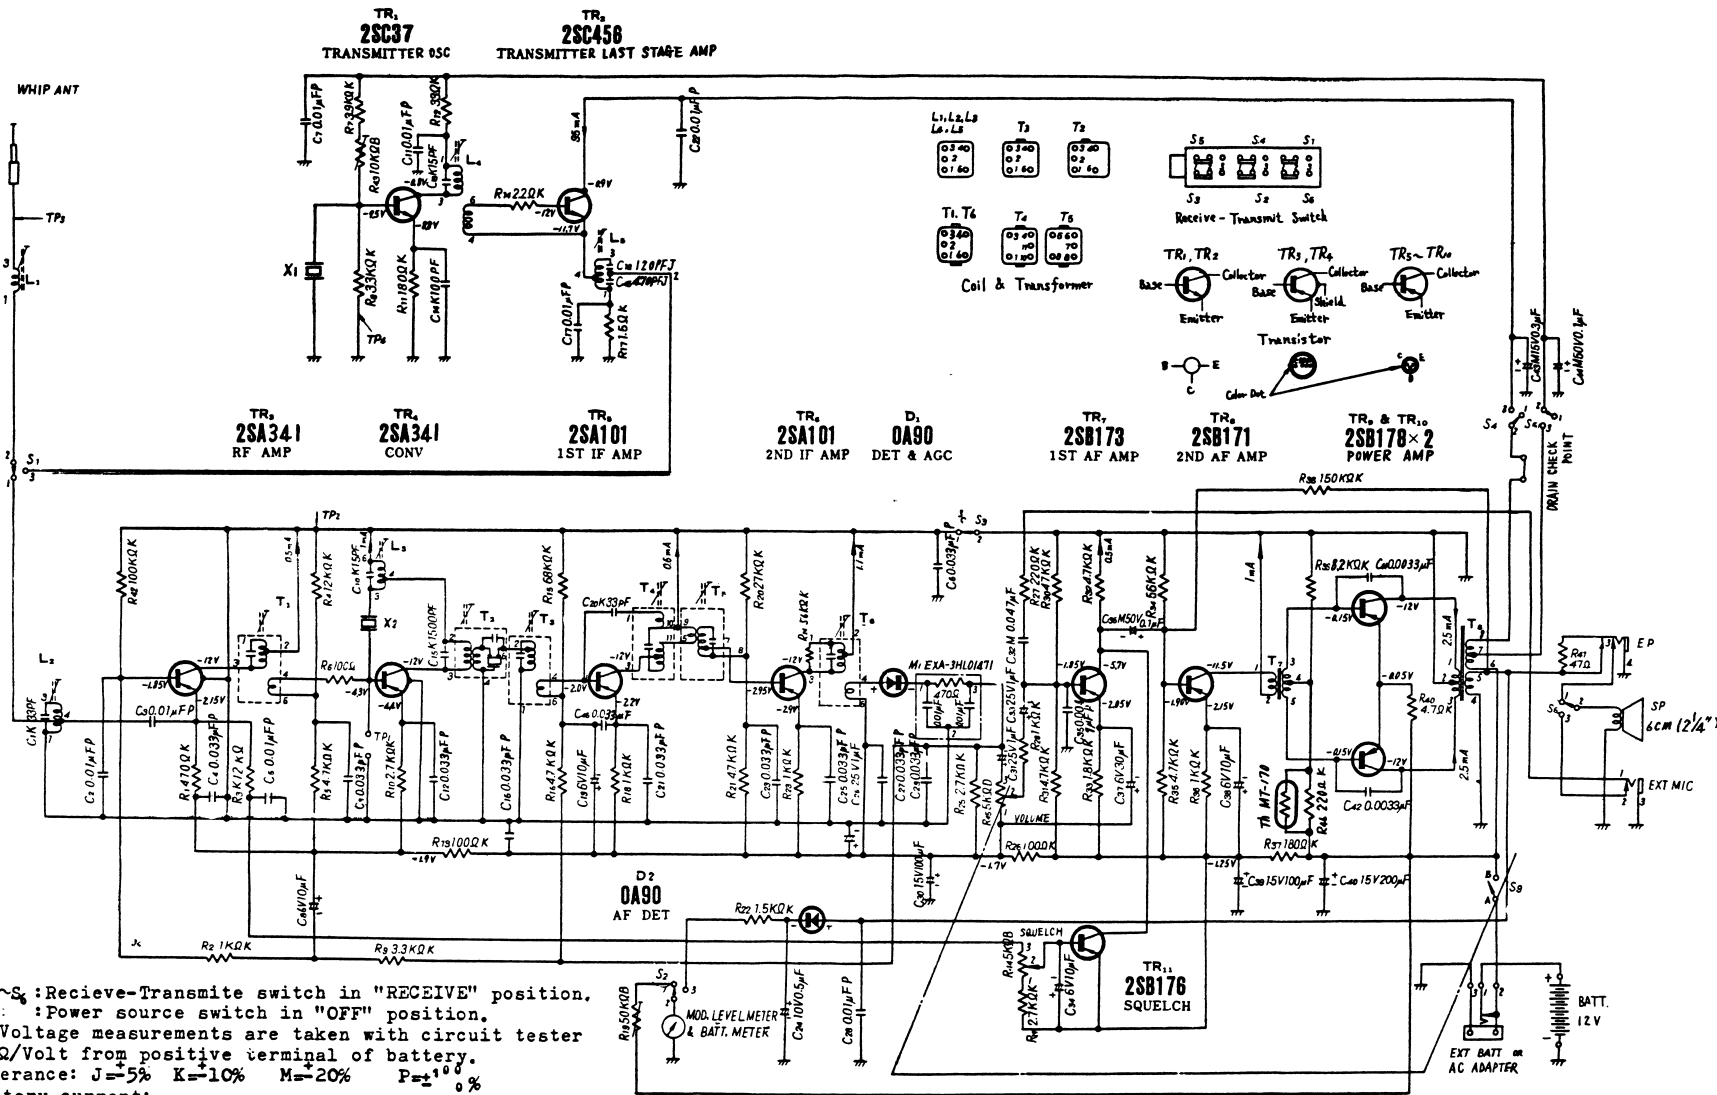

- Notes:
1. S₁ ~ S₆: Receive-Transmit switch in "RECEIVE" position.
 2. S₇: Power source switch in "OFF" position.
 3. DC Voltage measurements are taken with circuit tester 10KΩ/Volt from positive terminal of battery.
 4. Tolerance: J=5% K=10% M=20% P=10%
 5. Battery current:
 Receiver No signal.....18mA
 Maximum output.....60mA
 Transmitter.....135mA

Fig. 1 Schematic Diagram.