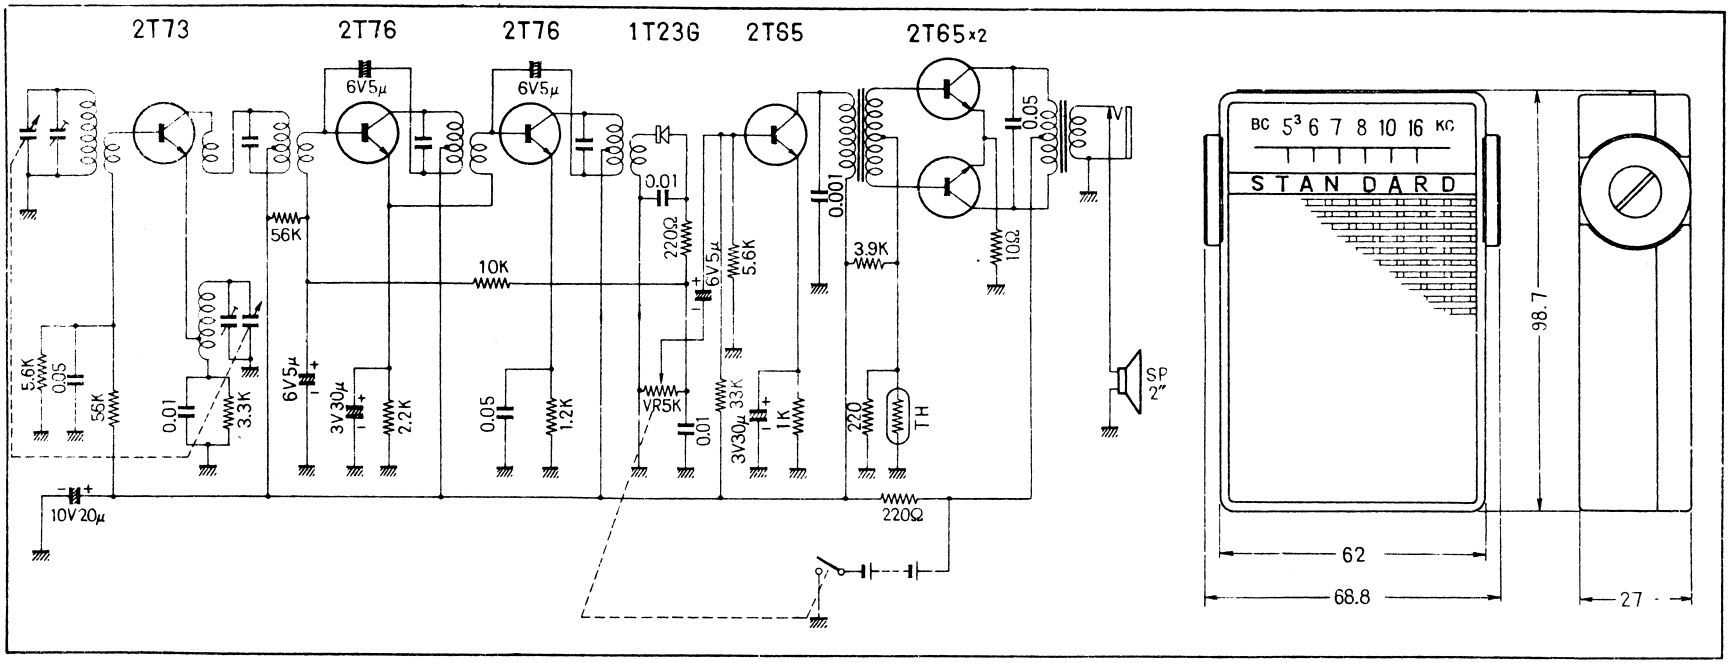

"STANDARD"

6-Transistor Pocket Radio SR-F211

SPECIFICATION

Circuit	6-Transistor Superheterodyne
Receiving Range	540—1600 KC
Intermediate Frequency	455 KC
Antenna	14×4×45 mm
Output	100 mW
Speaker	2" Dynamic Speaker
Battery	9v BL-006P or Eveready No. 216
Earphone	MD-226 Magnetic Earphone
Dimension	62×98×27 mm

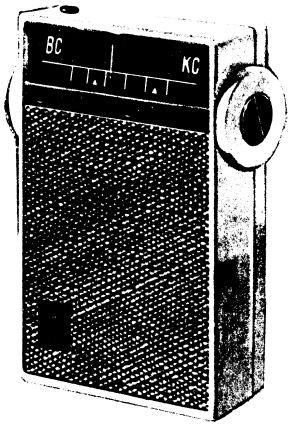

STANDARD RADIO CORPORATION