



HITACHI

For installation of Hitachi car radio


Model TM-435AU

Ascertain that your car has a negative ground electrical system. Referring to the figure, install the radio in your car. The TM-435AU can be mounted up to 11.5mm thickness of instrument panel.

NOTE : If the distance between radio case and escutcheon is 7mm or more, remove the shaft covers to mount the radio.

It is necessary to use a noise eliminator (CAPACITOR and RESISTOR) when much noise is raised in the radio.

NOTE : It is not necessary to use a noise eliminating resistor on car which has distributor or ignition leads equipped with a noise eliminating resistor.

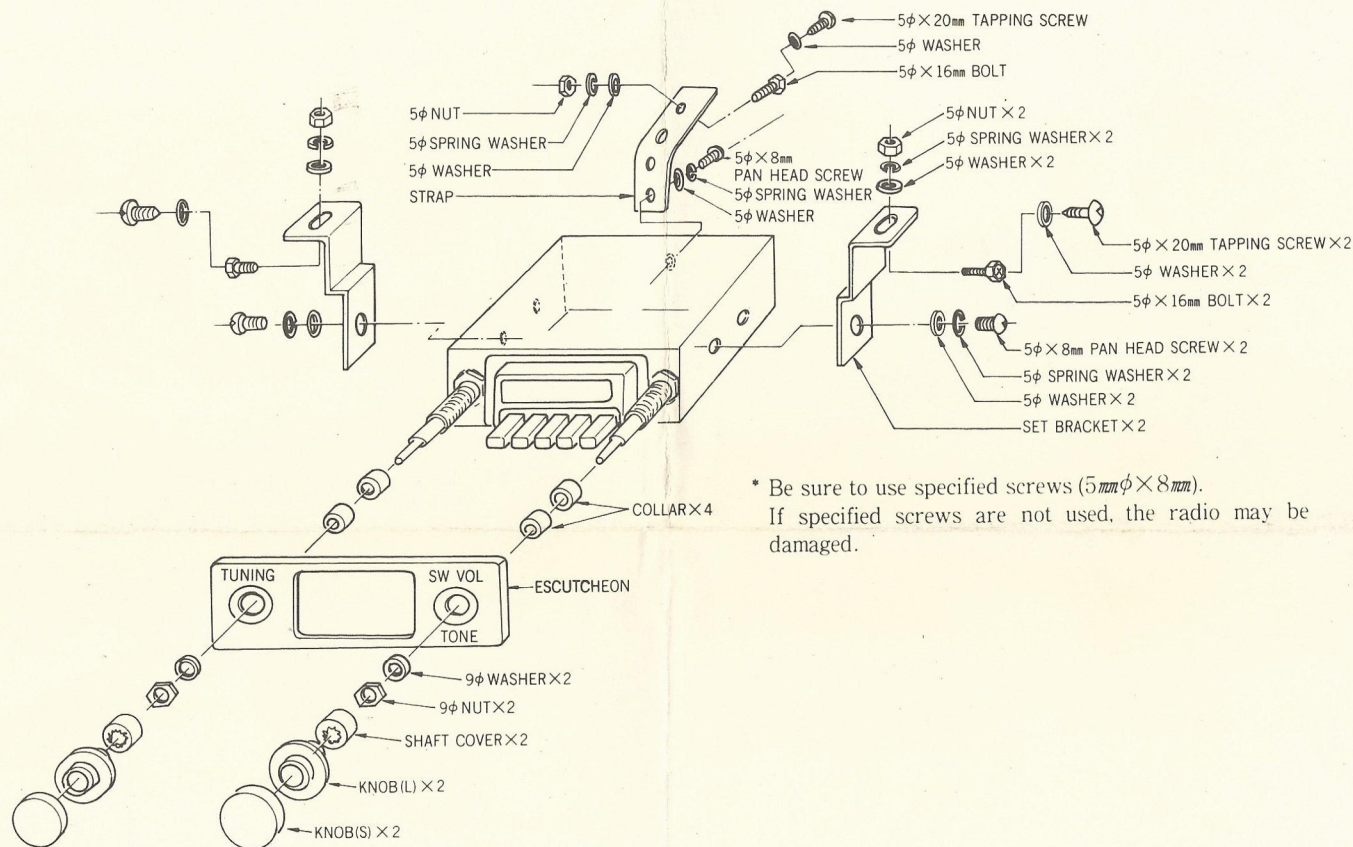

* Be sure to use specified screws (5mmφ × 8mm).
If specified screws are not used, the radio may be damaged.

