


Voltage and current distribution at zero signal


S27

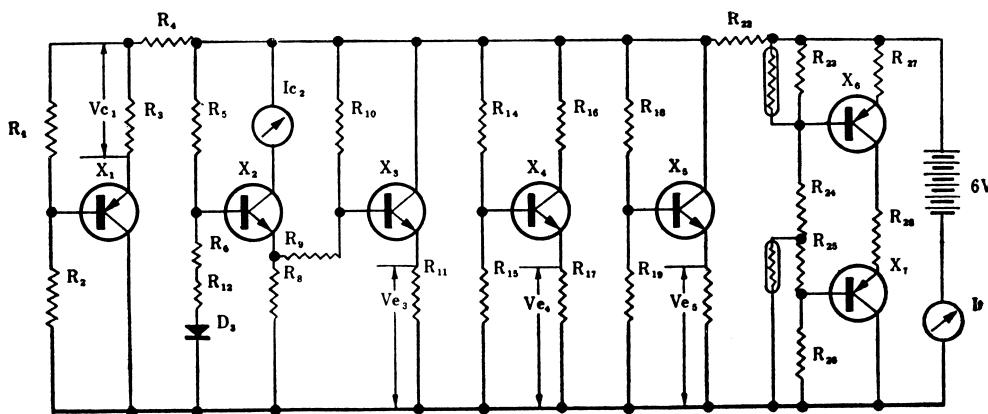

	Collector current	Voltage
X ₁	250—400 μ A	0.55—0.88 (V _{C1})
X ₂	300—400 μ A	
X ₃	0.8—1.0 mA	0.37—0.47 (V _{e3})
X ₄	0.8—1.3 mA	0.8—1.3 (V _{e4})
X ₅	5.0—7.0 mA	1.1—1.5 (V _{e5})
X ₆ , X ₇	1.5—2.5 mA (total)	
		Battery current at zero signal 13—16 mA

SONY

Schematic diagram TR-717B and TR-717Y

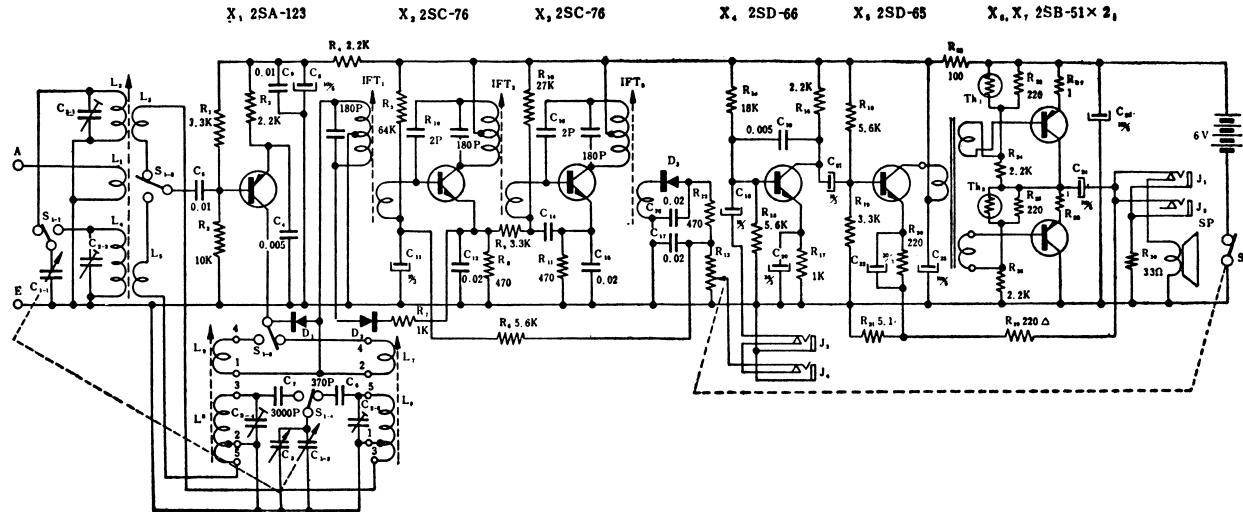

SONY MODEL TR-717B-717Y

Mounting diagram (printed side)

