


Part No.	Symbol	Description	Part No.	Symbol	Description
	X ₁	Transistor 2SC73	1-203-065-00	R ₇	5.6 K Ω ¼ W Carbon
	X ₂	// 2SC76	-026-00	R ₈	470 Ω // //
	X ₃	// 2SC76	-031-00	R ₉	1 K Ω // //
	X ₄	// 2SD65	1-221-501-11	R ₁₀	5 K Ω Volume Control
	X ₅	// 2SB379	1-203-130-00	R ₁₁	18 K Ω ¼ W Carbon
	X ₆	// 2SB379	-049-00	R ₁₂	2.2 K Ω // //
	D ₁	Diode IT23G	-018-00	R ₁₃	220 Ω // //
1-201-601-00	Th	Thermistor CS-120	-011-00	R ₁₄	100 Ω // //
1-401-202-11	L ₁	Ferrite Bar Antenna	-064-00	R ₁₅	4.7 K Ω // //
1-405-250-11	L ₂	Oscillator Coil	-003-00	R ₁₆	10 Ω // //
1-403-025-02	IFT ₁	IF Transformer			
-026-02	IFT ₂	//	1-151-054-00	C _{1, 2}	Tuning Capacitor
-027-02	IFT ₃	//		C ₃	150PF (Built in IFT ₁)
1-423-062-11	T ₁	Driver Transformer		C ₄	150PF (Built in IFT ₂)
1-427-073-00	T ₂	Output Transformer		C ₅	150PF (Built in IFT ₃)
1-507-011-01	J	Earphone Jack	1-101-072-11	C ₆	0.01 μF Ceramic
1-502-093-12	SP	Speaker	-477-11	C ₇	0.005 μF //
1-528-003-00	SW	Power Switch (built in R ₁₀)	1-121-112-05	C ₈	10 μF 3V Electrolytic
	Batt	Battery	1-101-072-11	C ₉	0.01 μF Ceramic
			-072-11	C ₁₀	0.01 μF //
			-072-11	C ₁₁	0.01 μF //
			-073-11	C ₁₂	0.02 μF //
1-203-100-00	R ₁	100 K Ω ¼ W Carbon	1-121-112-05	C ₁₃	10 μF 3V Electrolytic
-131-00	R ₂	7.5 K Ω // //	-113-05	C ₁₄	30 μF 3V //
-084-00	*R ₃	30 K Ω // //	1-103-058-12	C ₁₅	500PF Styrol
-065-00	R ₄	5.6 K Ω // //	1-121-110-05	C ₁₆	30 μF 10V Electrolytic
-026-00	R ₅	470 Ω // //	1-101-073-11	C ₁₇	0.02 μF Ceramic
-065-00	R ₆	5.6 K Ω // //			



* To be adjusted

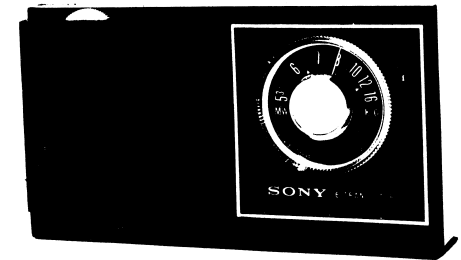