


T29

Ten CSL-110

- NUMBER OF TRACKS8 track 2 channel
- TAPE CARTRIDGE.....Lear Jet type
- TAPE SPEED.....3 3/4 i.p.s. (9.5 cm/sec)
- SPEAKER IMPEDANCE.....4 ohm per channel
- POWER OUTPUT.....3 watts per channel (KF=10%), 6 watts total
- FREQUENCY RESPONSE.....100 to 7,500 Hz
- CROSSTALK40 dB or better between adjacent tracks
30 dB or better between right and left channel
- WOW & FLUTTER.....0.3% or less (WRMS)
- POWER INPUT.....12 volt car battery, negative terminal to ground
- Voltage13.2VDC
- CurrentApprox. 0.7 ampere at 0.5 watt output
Approx. 2.4 amperes at track selection

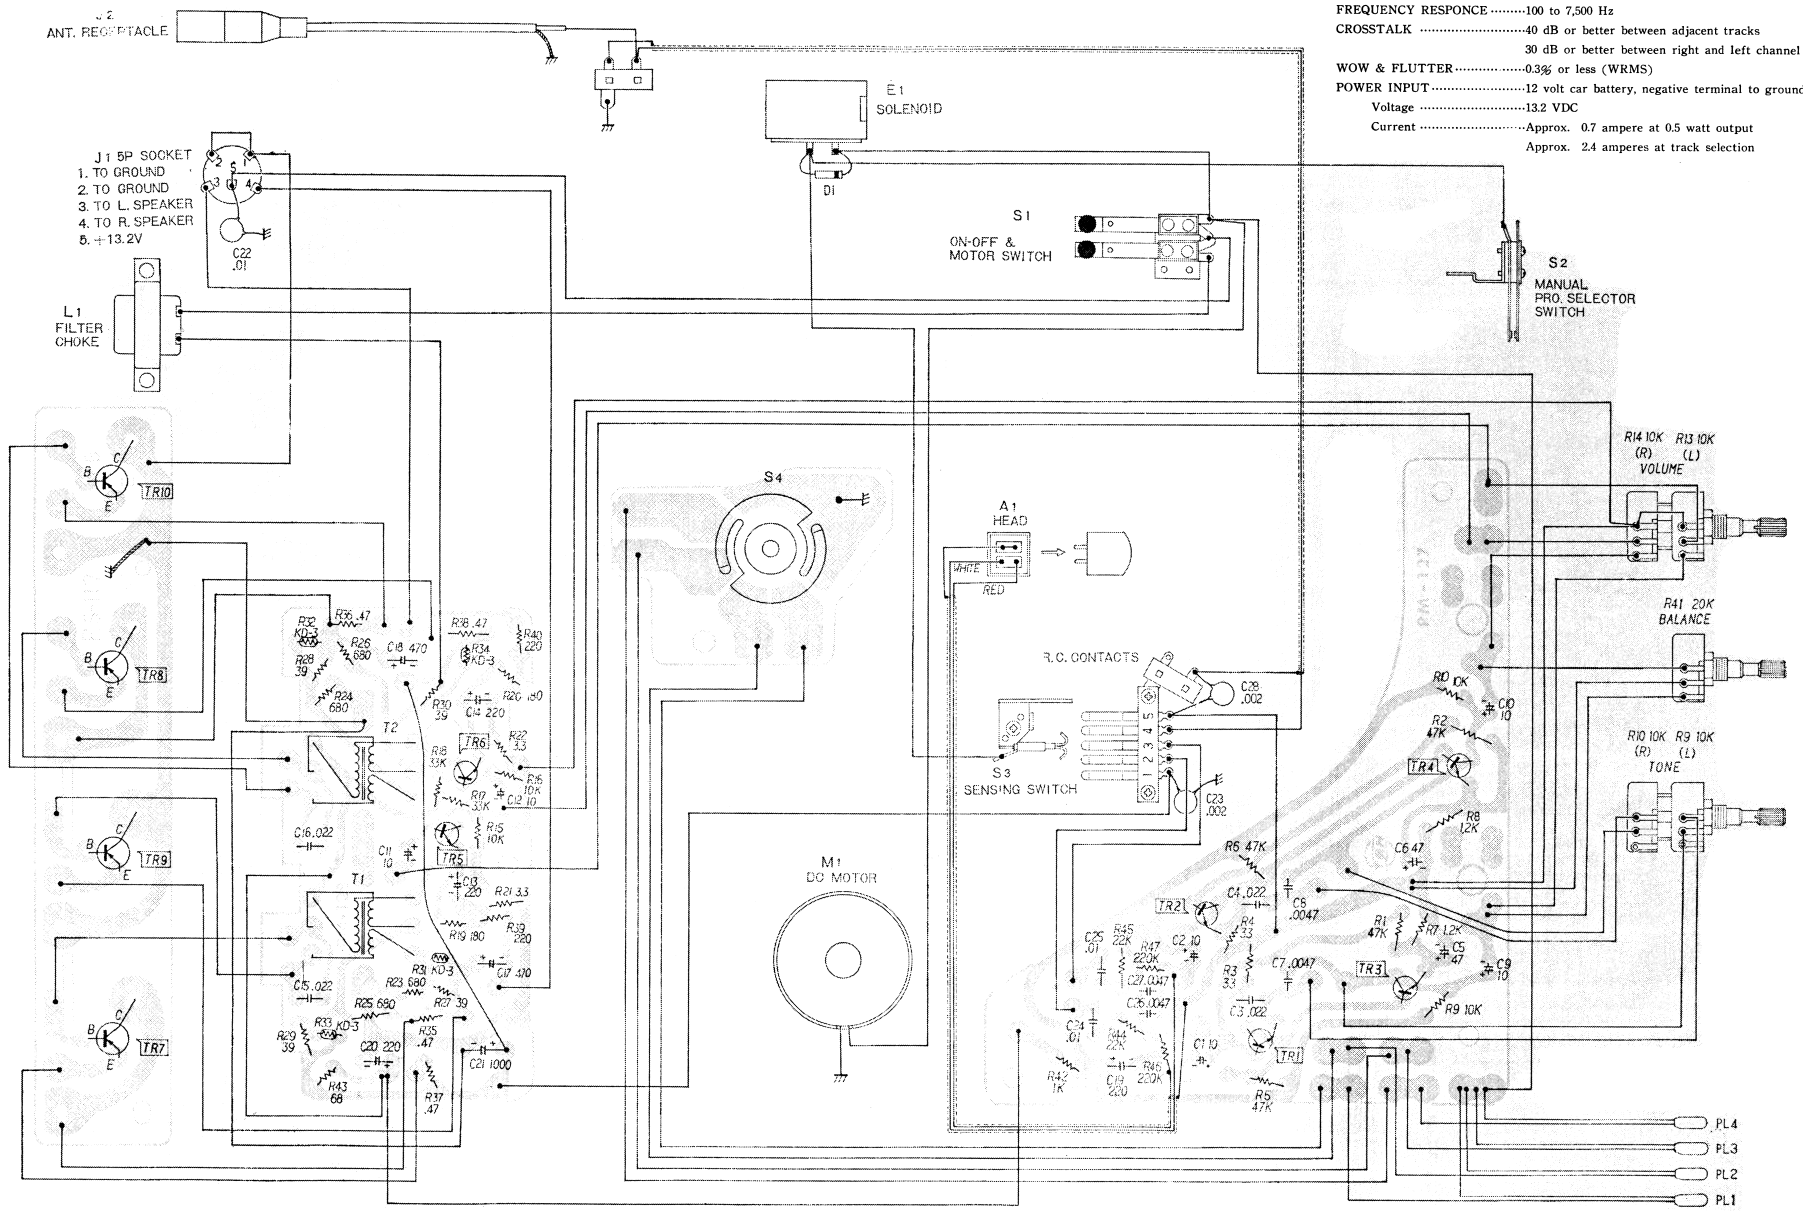

J1 5P SOCKET
1. TO GROUND
2. TO GROUND
3. TO L. SPEAKER
4. TO R. SPEAKER
5. +13.2V

L1 FILTER
CHOKE

M1
DC MOTOR

S1
ON-OFF &
MOTOR SWITCH

S2
MANUAL
PRO. SELECTOR
SWITCH

R14 10K R13 10K
(R) (L)
VOLUME

R41 20K
BALANCE

R10 10K R9 10K
(R) (L)
TONE

PL4
PL3
PL2
PL1