


5 Valve

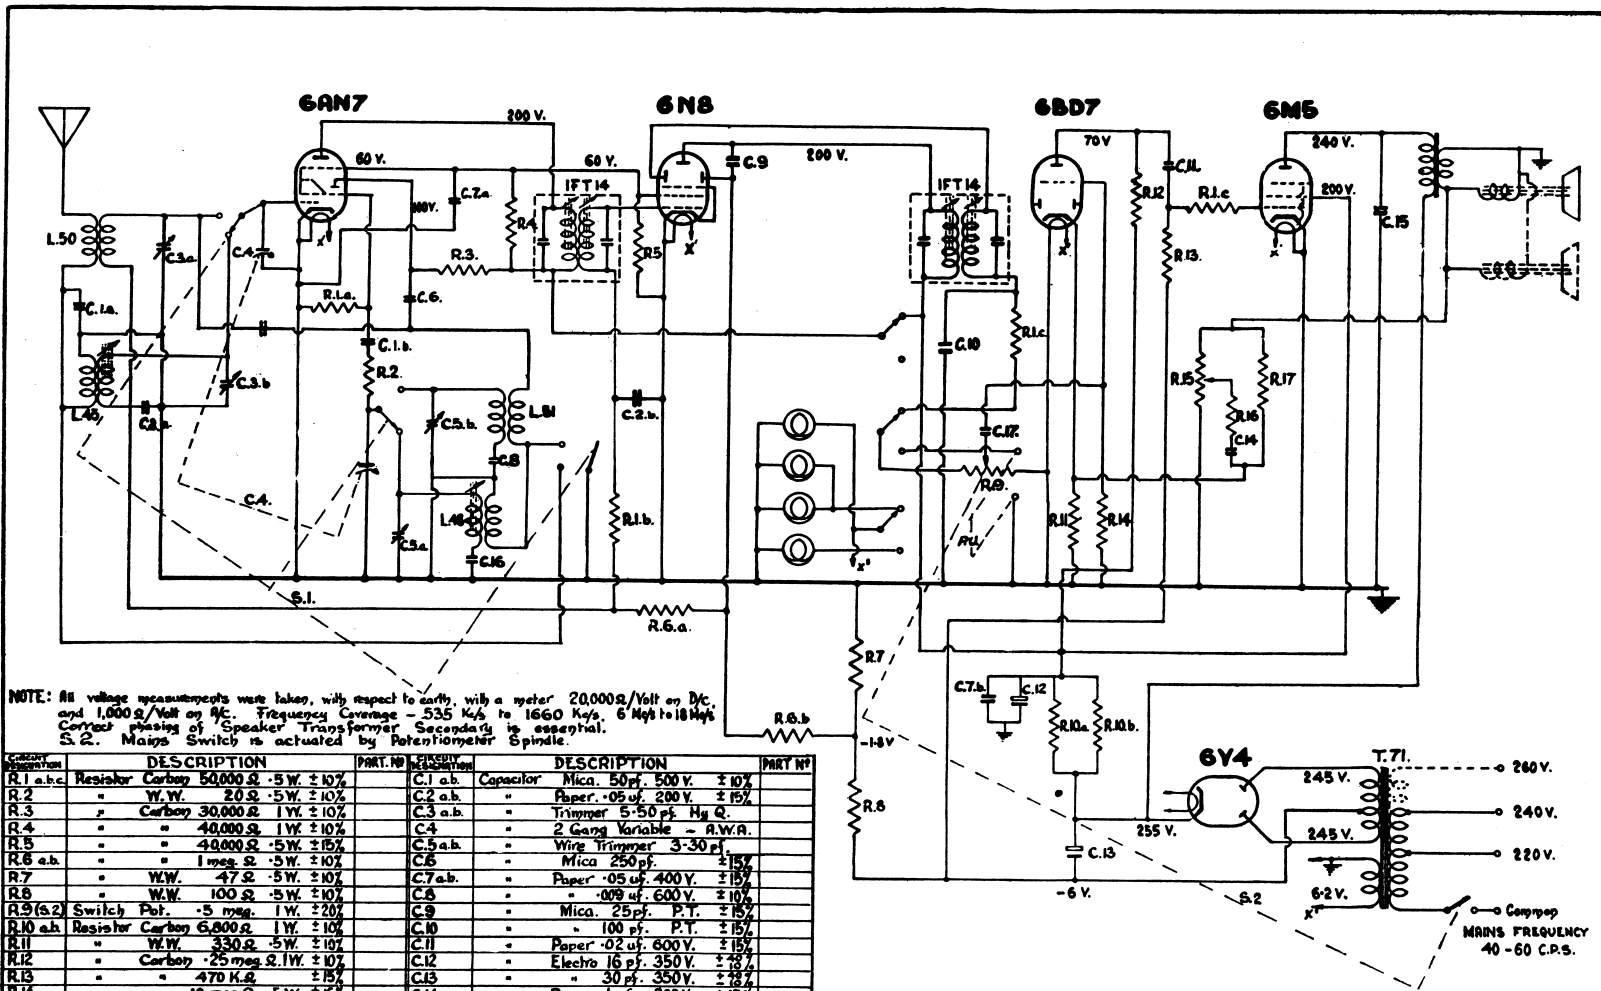

NOTE: All voltage measurements were taken, with respect to earth, with a meter 20,000Ω/Volt on D.C. and 1,000Ω/Volt on A.C. Frequency Coverage - 535 Kcs to 1660 Kcs. 6 Mpts to 18 Mpts. Correct phasing of Speaker Transformer Secondary is essential. S. 2. Mains Switch is actuated by Potentiometer Spindle.

Quantity	DESCRIPTION	PART. NO.	CLASSIFICATION	DESCRIPTION	PART. NO.
R.1 a,b,c	Resistor Carbon 50,000 Ω -5W. ±10%	C.1 a,b	Capacitor Mica .50 pf. 500 V. ±10%		
R.2	" W.W. 20 Ω -5W. ±10%	C.2 a,b	" Paper .05 uf. 200 V. ±15%		
R.3	" Carbon 30,000 Ω 1W. ±10%	C.3 a,b	" Trimmer 5-50 pf. Hg Q.		
R.4	" " 40,000 Ω 1W. ±10%	C.4	" 2 Gang Variable - A.W.A.		
R.5	" " 40,000 Ω -5W. ±15%	C.5 a,b	" Wire Trimmer 3-30 pf.		
R.6 a,b	" " 1 meg. Ω -5W. ±10%	C.6	" Mica 250 pf. ±15%		
R.7	" W.W. 47 Ω -5W. ±10%	C.7 a,b	" Paper .05 uf. 400 V. ±15%		
R.8	" W.W. 100 Ω -5W. ±10%	C.8	" .009 uf. 600 V. ±10%		
R.9 (S.2)	Switch Pot. -5 mpa. 1W. ±20%	C.9	" Mica. 25 pf. P.T. ±15%		
R.10 a,b	Resistor Carbon 6,800 Ω 1W. ±10%	C.10	" .100 pf. P.T. ±15%		
R.11	" W.W. 330 Ω -5W. ±10%	C.11	" Paper .02 uf. 600 V. ±15%		
R.12	" Carbon .25 meg. Ω 1W. ±10%	C.12	" Electro 16 pf. 350 V. ±15%		
R.13	" " 470 K.Ω ±15%	C.13	" .30 pf. 350 V. ±15%		
R.14	" " 10 meg. Ω -5W. ±15%	C.14	" Paper .1 uf. 200 V. ±15%		
R.15	Potentiometer - 20,000 Ω 1W. ±20%	C.15	" .005 uf. 600 V. ±15%		
R.16	Resistor - 220 Ω -5W. ±15%	C.16	" Mica. 435 pf. ±2 1/2%		
R.17	" - 18,800 Ω -5W. ±15%	C.17	" Paper .002 mf. 600 V. ±15%		
		S.1	Switch Wave Change 2 Pos. 3 Pole	17-20	
		IFT 14	I.F. Transformer 455 kc.	24-14	
			Transformer Power		
L.45	Aerial B/C Coil	14-7	IFT 14		
L.50	S/W	14-12			
L.46	Oscillator B/C Coil	14-10			
L.51	" S/W	14-13	Speaker	2ohm-8 Ohms 7,000 Ω to 13- Mod. # 11-44, 11-45, 11-46, 11-47	
				1ohm-12 Ohms 7,000 Ω to 23- Mod. # 11-44	

When ordering replacement parts, please state the following :-
Receiver, Model No., Chassis No., Part No., Circuit Designation, General Description.

MATERIAL	DRAWN	PROJECT	QTY.	PROJECT	QTY.	PROJECT	QTY.
GAUGE	TRACED						
FINISH	PLANNED						
Prescription No.	APPROVED						
<p>RECEIVER. A.C. — 11-44, 11-45, 11-46 & 11-47.</p> <p>Before production is commenced 2 copies must be submitted to Drawing Office for approval. ISSUE 1</p> <p>This Drawing must be returned to KRIESLER AUSTRALASIA LIMITED, 48 ALICE STREET, NEWTOWN. SCALE</p>							