


When ordering replacement parts please state the following:-
Model No, Chassis No, Part No, Circuit Designation and General Description.

CIRCUIT DESIGNATION	DESCRIPTION.	PART NO	CIRCUIT DESIGNATION	DESCRIPTION.	PART NO
C1	Capacitor 100pF I.F. Type.		R1a,b	Resistor 47KΩ ½W Carbon ±10%	
C2	" Trimmer Hy-Q 5-50 pF.		R2	" 39 KΩ ½W " ±10%	
C3	" Two Gang Strom. Conl.		R3	" 27 KΩ 1W " ±10%	
C4	" 50 pF Mica ±15%		R4a,b,c	" 470KΩ ½W " ±10%	
C5a,b,c	" 250pF Mica ±15%		R5	" 39 KΩ 1W " ±10%	
C6	" Trimmer Wire 3-30 pF.		R6a,b	" 1MΩ ½W " ±10%	
C7	" 435 pF Mica ±25%		R7	" 100KΩ ½W " ±10%	
C8a,b	" .03µF 400V Paper. ±15%		R8	" 2.2MΩ ½W " ±10%	
C9	" .05µF 200V Paper. ±15%		R9	Switch Potentiometer 250Ω C Taper	32-53
C10	" 150pF Mica ±15%			Single pole, Single throw.	
C11	" 500 pF Mica - ±15%		R10	Resistor 10MΩ ½W Carbon ±10%	
	- or Hi-K Ceramic		R11	" 1KΩ ½W " ±10%	
C12	" .002µF 600V Paper ±10%		R12	" 270KΩ 1W " ±10%	
C13a,b	" .02µF 600V Paper ±10%		R13	" 220Ω ½W " ±10%	
C14	" .005µF 600V Paper ±15%		R14	" 22KΩ ½W " ±10%	
C15	" 16µF 350V. Electro. ±25%		R15	Potentiometer ½MΩ " C Taper	32-45
C16	" 30µF 350V. Electro. ±20%		R16a,b	Resistor 6.8KΩ 1W " ±10%	
			R17	" 330 Ω 1W W.W. ±10%	
L1	Coil - BC - Aerial.	14-23			
L2	Coil - BC - Oscillator	14-22			
IFT a,b	I.F. Transformer 455 Kcs.	24-18	PL 1+2	Dial Light 6.3V. 3A, MES base.	
T1	Power Transformer	18-62	SP	Speaker - Rola 5x4 C.	
T2	Speaker Transformer - Rola E86 96 7000Ω → MΩ		Mof.	Motor - Collored Rim Drive - Model 3/554	
S3	Switch - Oak.	17-42		Crystal Cartridge - Studio 'O'	

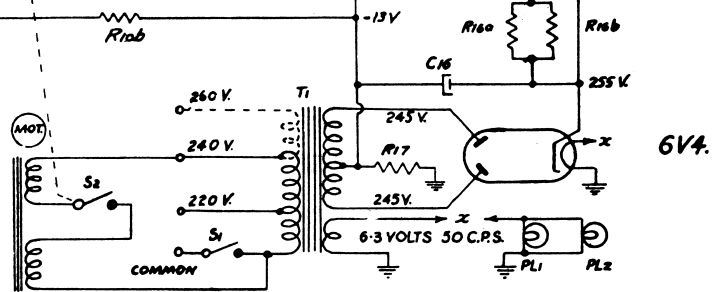

Note:- Voltages measured with respect to Earth with a voltmeter, 1000Ω/V.

Frequency Coverage 535 Kcs - 1600 Kcs.

S1 Mains switch actuated by tone control potentiometer 32-53
S2 switch actuated by velocity trip mechanism on record player unit.

* R16 may not be used on all models

MATERIAL	PLANNED	PROJECT	QTY.	PROJECT	QTY.	PROJECT	QTY.
GAUGE	DRAWN	F. M. W.	22-9-58				
FINISH	CHECKED	A. R. V.					
Prescription No.	APPROVED	A. R. V.					
PORTABLE RADIOGRAM. AC			11-58.		Work to Standards only. Using otherwise specified. Tolerances to be read as:-		
Before production is commenced 2 samples must be submitted to Drawing Office for approval.			ISSUE 1		± on Drawings		
This Drawing must be returned to KRIESLER AUSTRALASIA PTY. LTD. 43 ALICE STREET, NEWTOWN.			SCALE				