



SPECIFICATIONS

Frequency range...540~1,600 kc
 IF frequency455 kc
 Power sourceLaminated 9V (006P) Batt.
 Output120 mw
 Speaker2 1/4" PM, 8 ohm. voice coil
 Antenna.....Ferrite core
 (With telescopic antenna jack)
 Toshiba PNP alloy junction type germanium transistors
 2SA73.....1 (Converter)
 2SA49.....1 (I.F. Amplifier)
 2SA53.....1 (I.F. Amplifier)
 1N60.....1 (Germanium diode
 Detector AGC)
 2SB54.....1 (Driver)
 2SB56.....2 (Output)
 Dimensions4 7/16" x 2 5/8" x 1 3/16"
 Weight10 ozs (including battery)
 Accessories1 Magnetic earphone
 1 Leather carrying case
 1 Telescopic antenna

Batteries sold everywhere

Toshiba006P
 Eveready216
 Ray-O-vac1604
 RCAVS312
 Burgess2U6

MODEL : 6TP-385

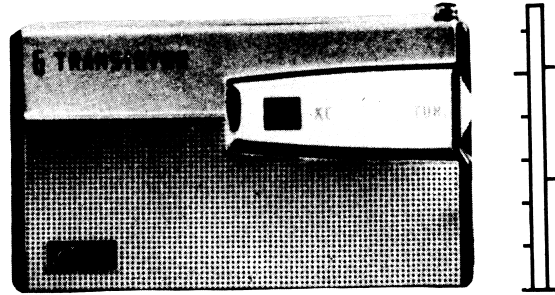

CIRCUIT DIAGRAM

