


Chassis Type 518

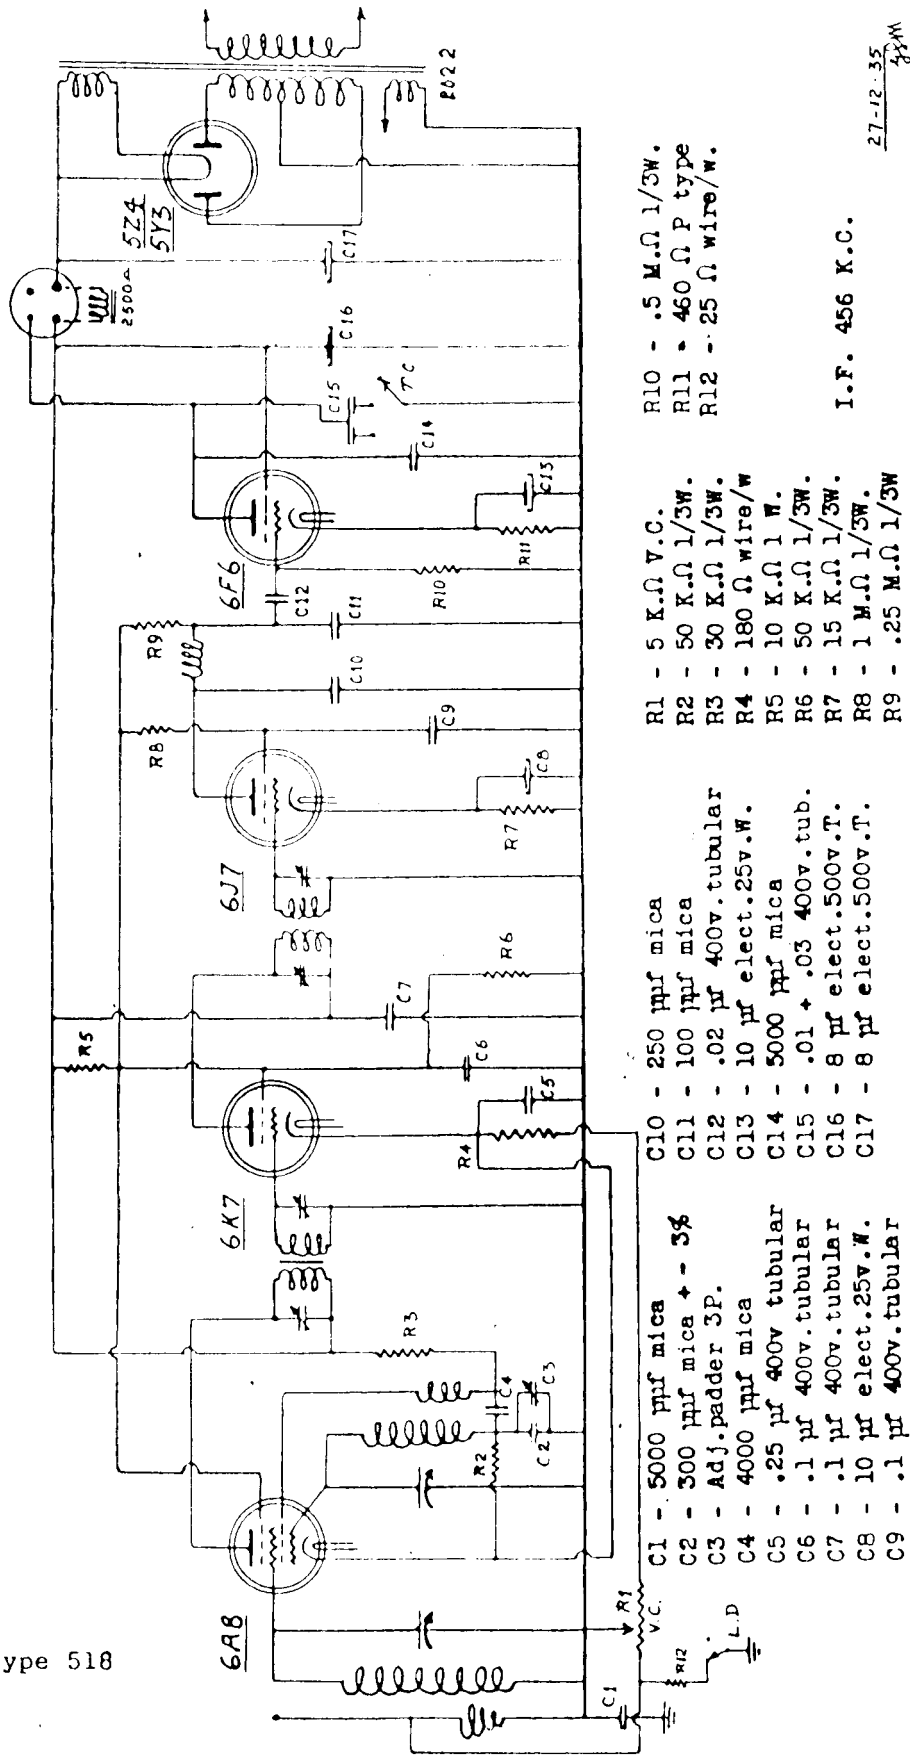

- C1 - 5000 µmf mica
  - C2 - 300 µmf mica + - 3%
  - C3 - Adj. padder 3P.
  - C4 - 4000 µmf mica
  - C5 - .25 µf 400v tubular
  - C6 - .1 µf 400v tubular
  - C7 - .1 µf 400v tubular
  - C8 - 10 µf elect. 25v.W.
  - C9 - .1 µf 400v tubular
  - C10 - 250 µmf mica
  - C11 - 100 µmf mica
  - C12 - .02 µf 400v tubular
  - C13 - 10 µf elect. 25v.W.
  - C14 - 5000 µmf mica
  - C15 - .01 + .03 400v tub.
  - C16 - 8 µf elect. 500v.T.
  - C17 - 8 µf elect. 500v.T.
  - R1 - 5 K.Ω V.C.
  - R2 - 50 K.Ω 1/3W.
  - R3 - 30 K.Ω 1/3W.
  - R4 - 180 Ω wire/w
  - R5 - 10 K.Ω 1 W.
  - R6 - 50 K.Ω 1/3W.
  - R7 - 15 K.Ω 1/3W.
  - R8 - 1 M.Ω 1/3W.
  - R9 - .25 M.Ω 1/3W
  - R10 - 5 K.Ω V.C.
  - R11 - 460 Ω P type
  - R12 - .25 Ω wire/w.
- I.F. 456 K.C.
- 27-12-35  
82M