


BANDMASTER "GRENADIER" 355B

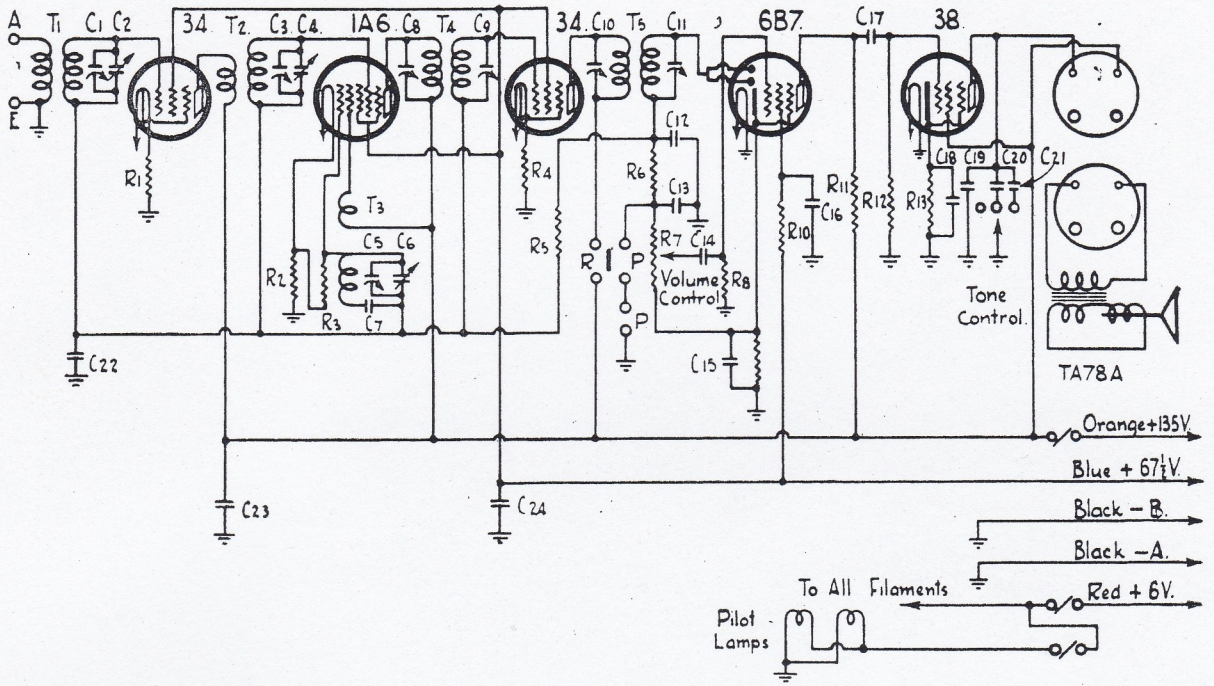

Code	COILS.	Code	RESISTORS.	Code	CONDENSERS.
T1	Aerial Coil	R1	65 ohms, Wire Wound	C1	10-50 mmfd. Mica Trimmer
T2	R.F. Coil	R2	65 ohms, Wire Wound	C2	Variable Condenser
T3	Oscillator Coil	R3	60,000 ohms, $\frac{1}{2}$ watt	C3	10-50 mmfd. Mica Trimmer
T4	First I.F. Transformer	R4	65 ohms, Wire Wound	C4	Variable Condenser
T5	Second I.F. Transformer	R5	$1\frac{3}{4}$ megohms, $\frac{1}{2}$ watt	C5	10-50 mmfd. Mica Trimmer
		R6	100,000 ohms, $\frac{1}{2}$ watt	C6	Variable Condenser
		R7	250,000 ohms, Volume Control	C7	900 mmfd. Mica Padding Condr.
		R8	$1\frac{3}{4}$ megohms, $\frac{1}{2}$ watt	C8	100-200 mmfd. Mica Trimmer
		R9	3,000 ohms, 1 watt	C9	100-200 mmfd. Mica Trimmer
		R10	500,000 ohms, $\frac{1}{2}$ watt	C10	10-50 mmfd. Mica Trimmer
		R11	100,000 ohms, 1 watt	C11	10-50 mmfd. Mica Trimmer
		R12	500,000 ohms, $\frac{1}{2}$ watt	C12	100 mmfd. Mica Condenser
		R13	1,300 ohms, Wire Wound	C13	100mmfd. Mica Condenser
				C14	.05 mfd. Paper Tubular
				C15	5 mfd. 25v. Electrolytic Condr.
				C16	.1 mfd. Paper Tubular Condr.
				C17	.05 mfd. Paper Tubular Condr.
				C18	25 mfd. 25v. Electrolytic Condr.
				C19	.005 mfd. Paper Tubular Condr.
				C20	.01 mfd. Paper Tubular Condr.
				C21	.02 mfd. Paper Tubular Condr.
				C22	.05 mfd. Paper Tubular Condr.
				C23	.5 mfd. Paper Tubular Condr.
				C24	.25 mfd. Paper Tubular Condr.

VALVE SOCKET VOLTAGES.

"A" Battery, 6 Volts; "B" Battery, 135 Volts.

Volume Control Maximum — No Signal.

VALVE.	Chassis to Cathode or Negative Fil. Volts.	Chassis to Screen Grid Volts.	Chassis to Plate Volts.	Plate Current M.A.	Filament or Heater Volts.
34 R.F.	4	67.5	135	2.5	2.0
1A6 1st Detector	4	67.5	135	1.3	2.0
Oscillator	—	—	135	1.5	—
34 I.F.	4	67.5	135	2.5	2.0
6B7 2nd Detector	1	25	60	0.5	6.0
38 Pentode	12	135	130	7.0	6.0