KRIESLER 41-35A.

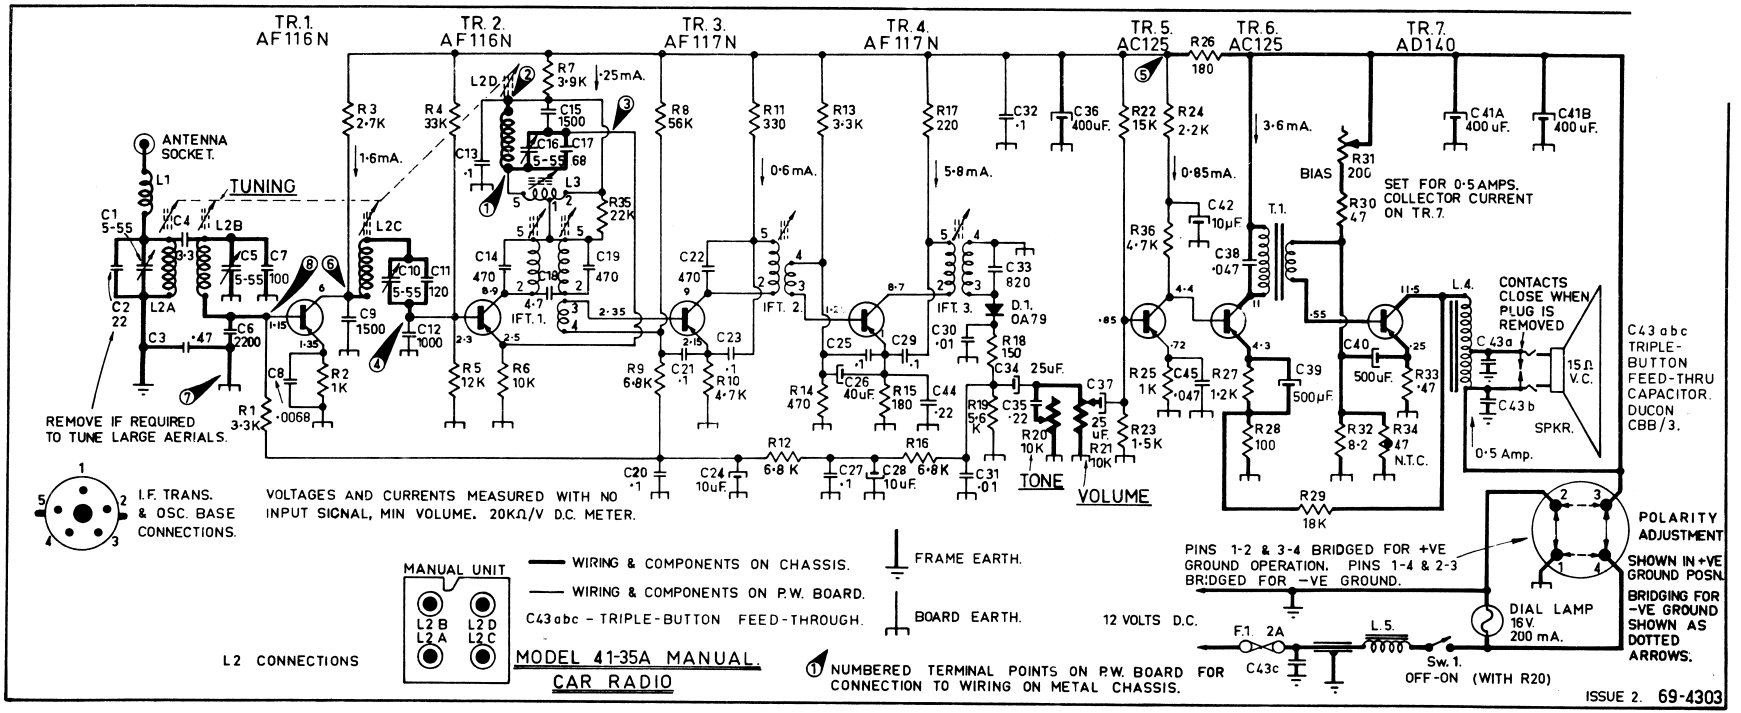

ELECTRICAL PARTS LIST — CAR RADIO MODEL 41-35A — BOARD No. 89-8.

CODE	DESCRIPTION		CODE	DESCRIPTION		CODE	DESCRIPTION	
R1	3.9K ¼W BTS 10%	I.R.C.	R32	8.2ohm ¼W BW½ 10%	I.R.C.	C26	40uF 4V Electro.	Philips
R2	1K " " "	"	R33	.47ohm 1W BW1 "	"	C27	.1uF 25V Ceramic	Ducon
R3	2.7K " " "	"	R34	47 ohm Thermistor	90-4567	C28	10uF 16V Electro.	Philips
R4	33K " " "	"	R35	22K ¼W BTS 10%	I.R.C.	C29	.1uF 25V Ceramic	Ducon
R5	12K " " "	"	R36	4.7K " " "	"	C30	.01uF 25V Ceramic	"
R6	10K " " "	"				C31	.01uF 25V Ceramic	"
R7	3.9K " " "	"	C1	5-55pF Mica Trimmer	M.S.P.	C32	.1uF 25V Ceramic	"
R8	56K " " "	"	C2	22pF 500V Ceramic NPO	Ducon	C33	820pF 500V Styroseal	"
R9	6.8K " " "	"	C3	.47uF 125V Polyester	Philips	C34	25uF 10V Electro.	Philips
R10	4.7K " " "	"	C4	3.3pF 500V Ceramic NPO	Ducon	C35	.22uF 25V Ceramic	Ducon
R11	330ohm " " "	"	C5	5-55pF Mica Trimmer GWA	"	C36	400uF 16V Electro.	Philips
R12	6.8K " " "	"	C6	2200pF 400V Polyester	Philips	C37	25uF 10V Electro.	"
R13	3.3K " " "	"	C7	100pF 500V Styroseal	Ducon	C38	.047uF 25V Ceramic	Ducon
R14	470ohm " " "	"	C8	6800pF 500V Ceramic	"	C39	500uF 6.4V Electro.	Philips
R15	180ohm " " "	"	C9	1500pF 400V Polyester	Philips	C40	500uF 6.4V Electro.	"
R16	6.8K " " "	"	C10	5-55pF Mica Trimmer GWA	Ducon	C41	400uF 16V Electro.	"
R17	220ohm " " "	"	C11	120pF 500V Styroseal	"	C42	10uF 25V Electro.	"
R18	150ohm " " "	"	C12	1000pF 400V Polyester	Philips	C43	Feed-through capacitor CBB/3	Ducon
R19	5.6K " " "	"	C13	.1uF 25V Ceramic	Ducon	C44	.22uF 25V Ceramic	"
R20	10K Pot. OFF-CH/TONE	32-5494	C14	470pF 500V Styroseal	"	C45	.047uF 25V Ceramic	"
R21	10K Pot. VOLUME (with R20	"	C15	1500pF 200V Styroseal	"			
R22	15K ¼W BTS 10%	I.R.C.	C16	5-55pF Mica Trimmer GWA	"	L1	R.F.Choke. 4.7uH. Type CL.	I.R.C.
R23	1.5K " " "	"	C17	68pF 500V Ceramic N470	"	L2	Permeability Tuner Unit.	Kr. 90-4227
R24	2.2K " " "	"	C18	4.7pF 500V Ceramic NPO	"	L3	Oscillator Shunt Coil.	Kr. 14-4534
R25	1K " " "	"	C19	470pF 500V Styroseal	"	L4	Speaker Transformer.	Kr. 28-4536
R26	180ohm " " "	"	C20	.1uF 25V Ceramic	"	L5	Filter Choke.	Kr. 28-4537
R27	1.2K " " "	"	C21	.1uF 25V Ceramic	"	T1	Driver Transformer.	Kr. 18-4294
R28	100ohm " " "	"	C22	470pF 500V Styroseal	"	IFT1A	I.F.Transformer.	Kr. 24-4315
R29	18K " " "	"	C23	.1uF 25V Ceramic	"	IFT1B	I.F.Transformer.	Kr. 24-4316
R30	47ohm " ½W " "	"	C24	10uF 16V Electro.	Philips	IFT2	I.F.Transformer.	Kr. 24-4317
R31	200ohm 5W AA Bias Control	"	C25	.1uF 25V Ceramic	Ducon	IFT3	I.F.Transformer.	Kr. 24-4318

MODEL 41-35A IS FITTED WITH SHORTER CONTROL KNOBS THAN MODEL 41-35.
PART No. OF KNOBS. VOLUME 36-4285
TUNING 36-4283
SMALL KNOBS 36-4282
SPIRAL SPRING 16-4251
SPRING CLIPS ..... SC02152 (SIMMONDS)

K3