


ARISTOCRAT MODEL 65IV
6 VALVE D.W. VIBRATOR.

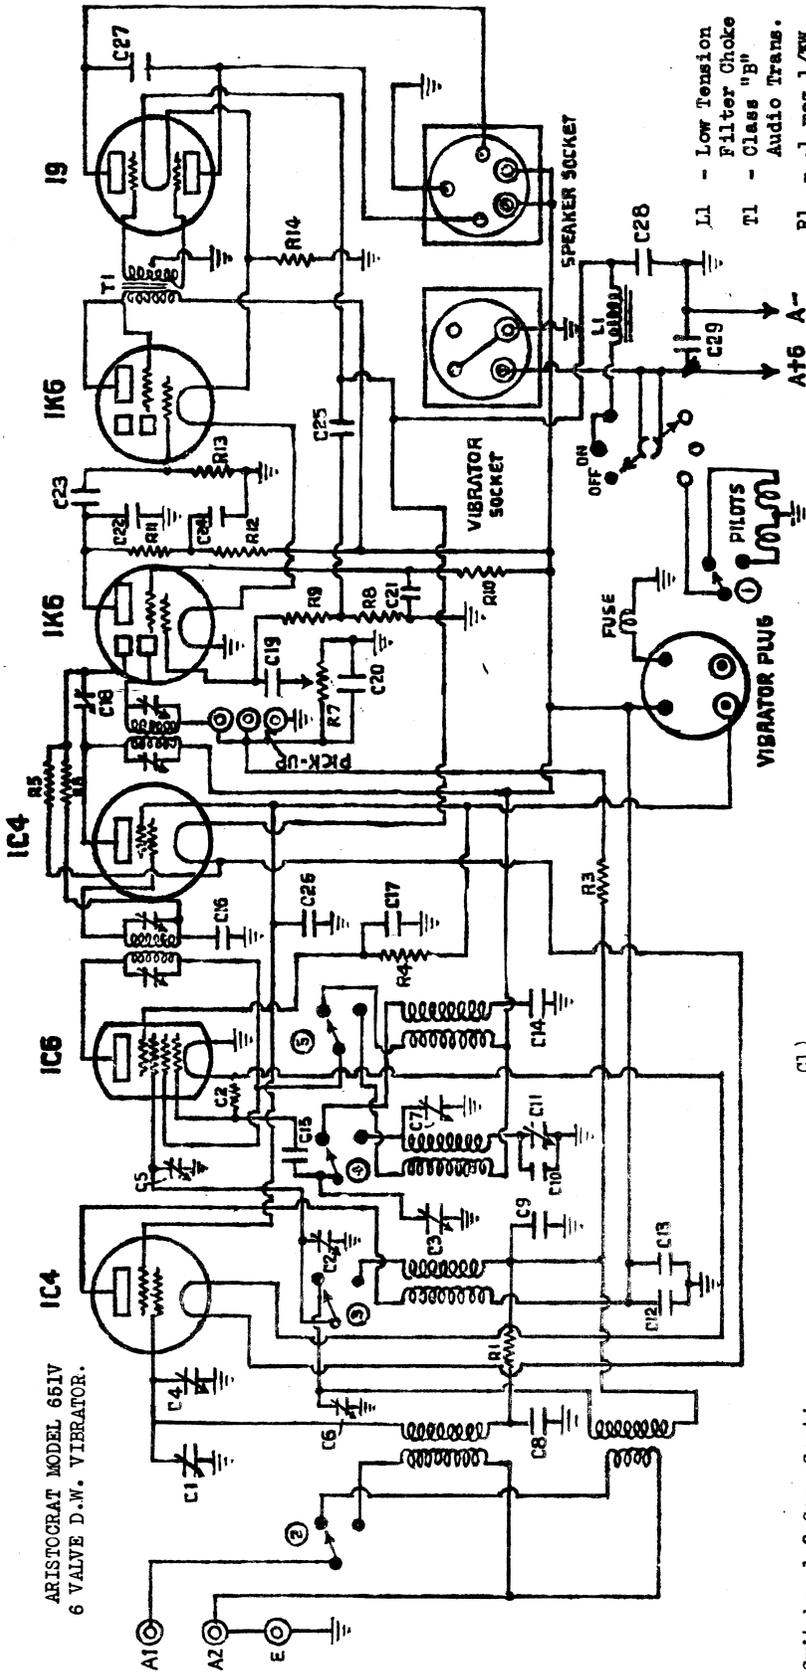

Switches 1,2 Same Section
 " 3 " " "
 " 4,5 " " "

VALVES:-

- 1C4 R.F. Amplifier
 - 1C6 Pentagrid Converter
 - 1C4 I.F. Amplifier
 - 1K6 2nd Detector
 - 1K6 Driver
 - 19 B class Output twin triode
- A Battery 6 volts.
 I.F. 465

- C1) - Stromberg F3 Gang
- C2) - .1 400 v.
- C3) - .1 400 v.
- C4) - 2 plate Trimmer
- C5) - .01 600 v.
- C6) - 2 plate trimmers
- C7) - .0001 Mica
- C8) - .05 600 v.
- C9) - .1 400 v.
- C10) - .0005 Mica
- C11) - B.C. Padder
- C12) - .01 Mica
- C13) - .1 400 v.
- C14) - .01 Mica
- C15) - .0001 Mica
- C16 - .1 400 v.
- C17 - .1 400 v.
- C18 - 2 plate Trimmer
- C19 - .01 600 v.
- C20 - .0001 Mica
- C21 - .1 400 v.
- C22 - .0004 Mica
- C23 - .01 "
- C24 - .5 400 v.
- C25 - .02 600 v.
- C26 - .1 400 v.
- C27 - .002 Mica
- C28 - 500.0 12 v.
- C29 - .5 400 v.

- L1 - Low Tension Filter Choke
- T1 - Class "B" Audio Trans.
- R1 - .1 meg 1/3W.
- R2 - .05 " 3W.
- R3 - 1.0 " 1/3W.
- R4 - .025 meg 1W.
- R5 - 1.0 " 1/3W.
- R6 - 1.0 " 1/3W.
- R7 - .5 meg. V.C.
- R8 - .05 " 3W.
- R9 - .5 " 1/3W.
- R10 - 1.0 " 1W.
- R11 - .1 " 1W.
- R12 - .05 " 1W.
- R13 - .5 " 1/3W.
- R14 - 33.2 ohms. Wire/W.