


MODEL 41-44A

Component changes from Model 41-44, which affect service manual parts list.

90-7685	Permeability tuner with manual drive assembly.
90-7655	Polarity plug.
4048-025-02	Filter choke. L4.
90-7075	Speaker socket assembly.
16-7688	Dial pointer.
20-4261	Dial back diffuser.
69-7686	Dial scales (set of 4).
20-7674	Volume knob.
20-7673	Tuning knob.
20-7675	Small knob.
C2	27 pF \pm 10% NPO Ceramic disc.
C7	120 pF \pm 5% 630V. Styro. cap.
C11	150 pF \pm 5% 630V. Styro. cap.
C16	3 — 30 pF NPO Wire trimmer.
32-7684	Vol. control with tone control and on/off switch.
14-7648 L5	Osc. series padder coil.
C31	.022 μ F \pm 20% Red cap.

CIRCUIT MODEL 41-44A

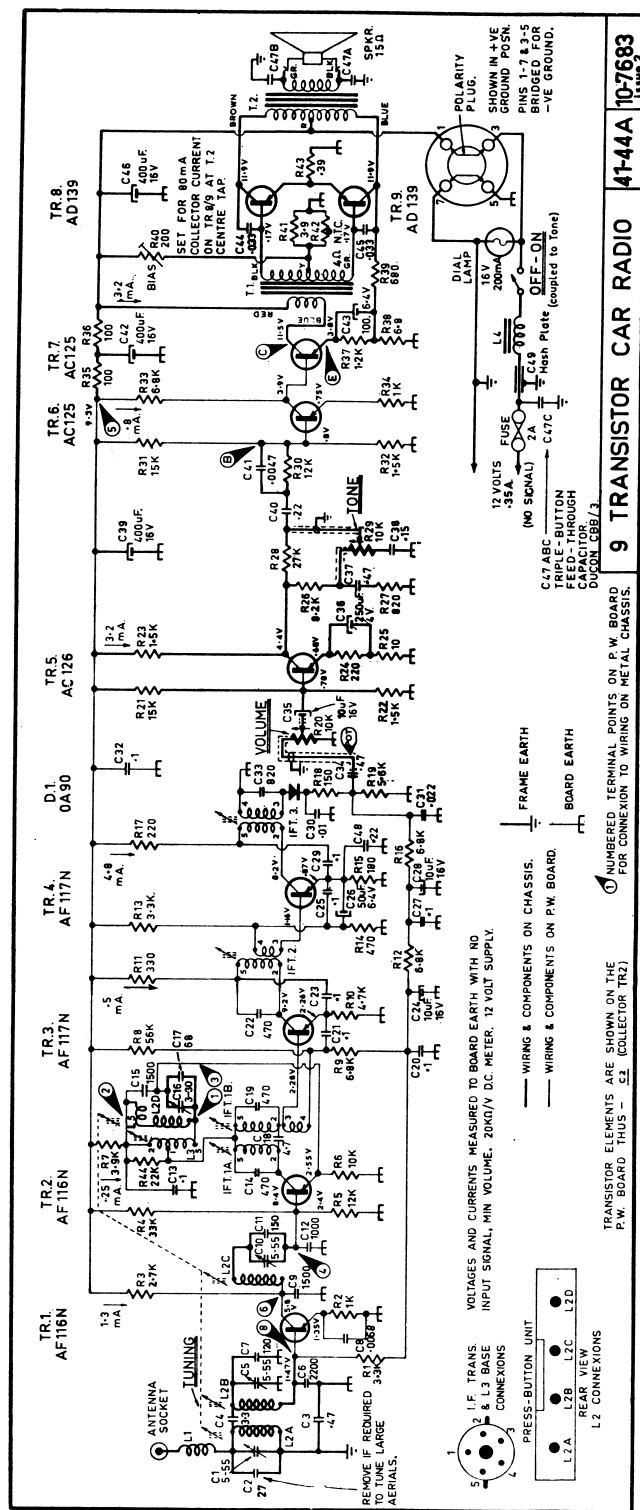

10-7683

9 TRANSISTOR CAR RADIO

TRANSISTOR ELEMENTS ARE SHOWN ON THE P.W. BOARD THUS - C1 (COLLECTOR TR2)

NUMBERED TERMINAL POINTS ON P.W. BOARD FOR CONNECTION TO WIRING ON METAL CHASSIS.