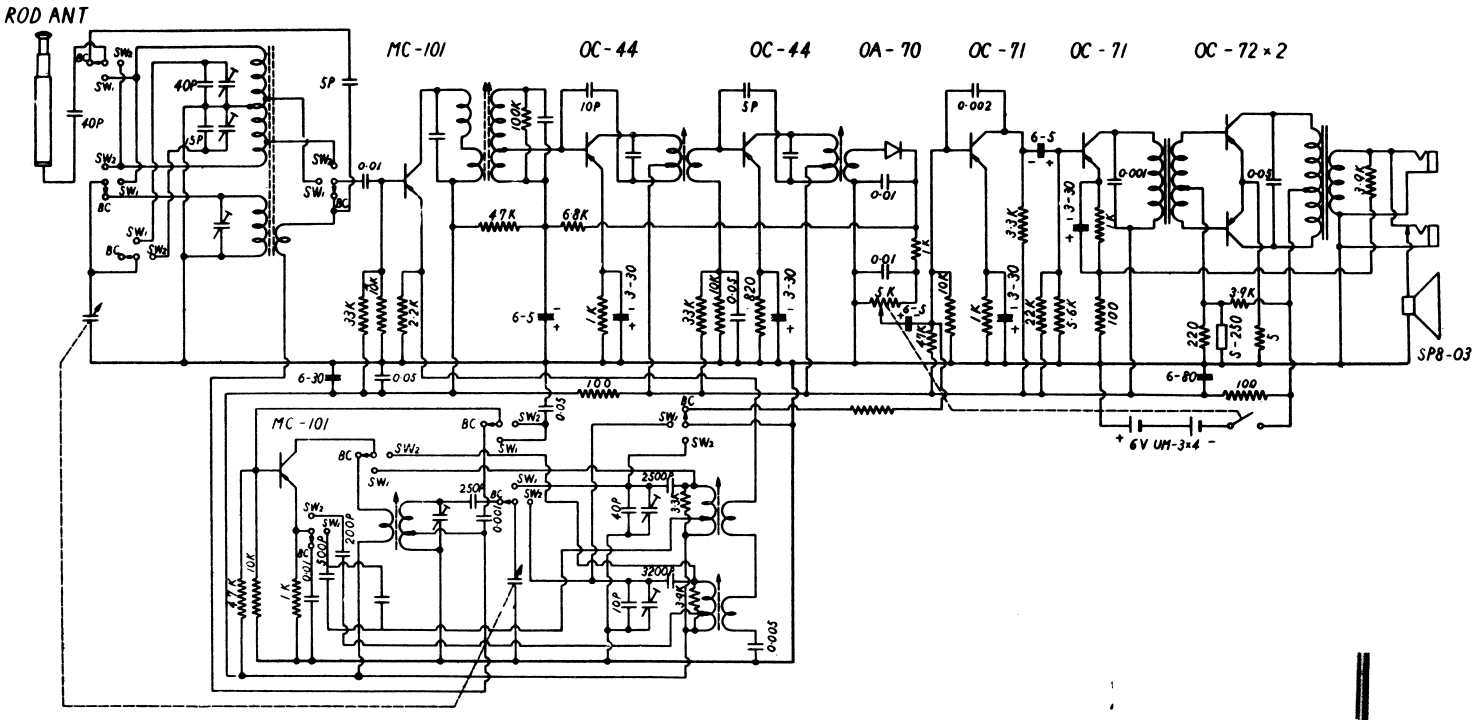


## SPECIFICATIONS

| | |
|---|---|
| Circuit | 8 Transistor Superheterodyne |
| Tuning Ranges | MW Band 540-1600 kc $SW_1$ Band 3.8-6.8 Mc $SW_2$ Band 5.8-12.0 Mc |
| Intermediate frequency | 455 kc |
| Antenna | 5 1/2″ Ferristick Core Antenna 36 5/8″ Sectional Antenna |
| Output Power | 150 mW |
| Speaker | 3″ Dynamic Speaker |
| Earphone | MD-226B "STANDARD" Magnetic Earphone |
| Electric Source | 6v. (4 pieces of 1.5v. pen-light battery Eveready 915) |
| Dimensions | 7 1/2″ × 4 3/8″ × 1 3/4″ |
| Weight | 1.65 lbs (750gr) Including batteries |

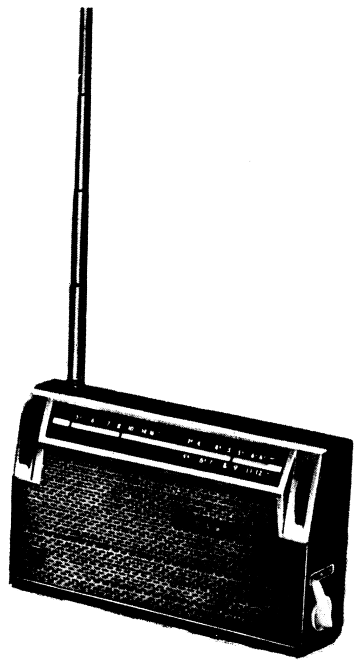

**SR-H105**